


SINGLE POLE CONNNECTORS

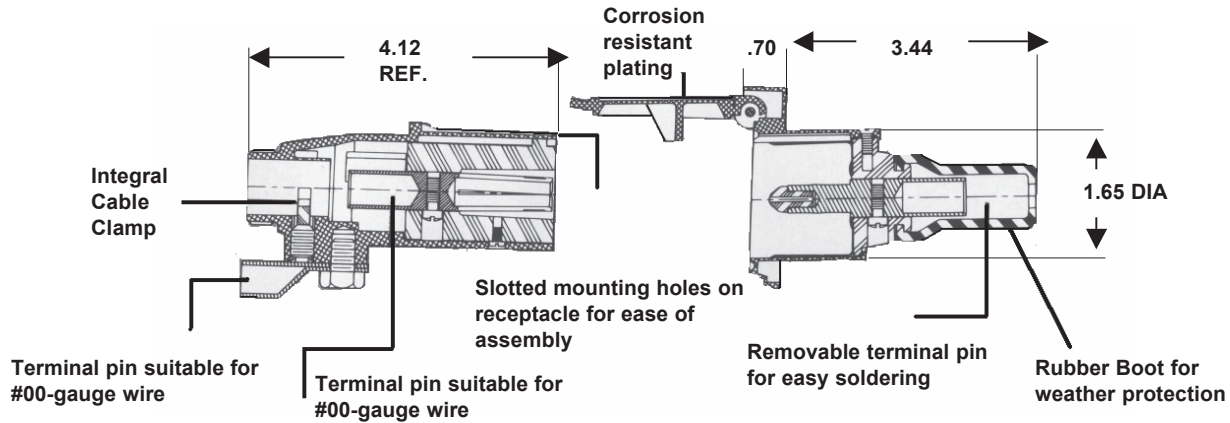

This rugged Single-pole Connector has a continuous duty capacity of 300 amps, and is ideal for many power applications on trucks, agricultural equipment, utility vehicles, winches, light air-craft ground equipment, etc. The connector is interchangeable with competitive brands.


Provides power for auxiliary equipment from battery.

11-852
Plug



11-852
Consist of 11-852
Plug and 11-851
Socket

11-851
Socket

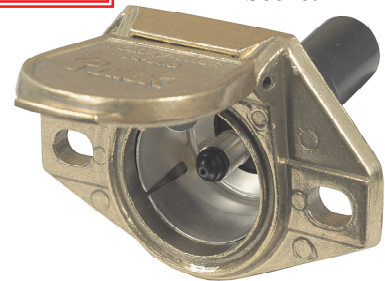

11-853
Consist of 11-852 Plug and
11-763 Cable Guard



11-762

Rubber Boot seals against dust and moisture.
Fits 11-852



11-763
Cable Guard
Plated Steel 3.56
long. Fits 11-852

11-771
Socket Bracket.
Fits 11-851



52-138
Battery Jumper
Terminal Positive
(Red Cap)



52-139
Battery Jumper
Terminal Negative
(Black Cap)



ACCESSORIES

WIRING COLOR CODES







RECREATION VEHICLE 7 - POLE CONNECTORS

No.	Color		Circuits	Recommended Wire Gauge
1	White		Ground Return	10 Ga
2	Blue		Electric Brake	12 Ga
3	Green		Tail, License and Running Lights	14 Ga
4	Black		Battery Charge	10 Ga
5	Red		Stop & Left Hand Turn Signal	14 Ga
6	Brown		Stop & Right Hand Turn Signal	14 Ga
7	Yellow		Auxiliary Circuit	14 Ga






HEAVY DUTY TRUCK 7 - POLE CONNECTORS

No.	Color		Circuits	Recommended Wire Gauge
1	White		Ground Return	8 Ga
2	Black		Clearance, Side Marker, and Identification Lamps	12 Ga
3	Yellow		Left Turn & Hazard Signal	12 Ga
4	Red		Stop Lamps & Anti-Lock Devices	10 Ga
5	Green		Right Turn Signal & Hazard Signal	12 Ga
6	Brown		Tail, Rear Clearance, Marker, and License Plate Lamps	12 Ga
7	Blue		Auxiliary Circuit/ABS	10 Ga

UNIVERSAL 6 - POLE CONNECTORS

No.	Color		Circuits
1	White		Ground Return
2	Brown		Tail Lights
3	Yellow		Left Turn
4	Red		Stop
5	Green		Right Turn
6	Blue		Auxiliary Circuit

UNIVERSAL 4 - POLE CONNECTORS

No.	Color		Circuits
1	White		Ground Return
2	Green		Right Turn & Brake Lights
3	Yellow or Red	 	Left Turn & Brake Lights
4	Brown		Tail Lights

Note: Check all circuits before operating vehicles