

NOTES:

① MAT'L: COPPER

PLATING: ELECTRO-TIN (.0003 MIN.)

② INSULATION: MOLDED PVC (RED)

STUD SIZES: (±.005)

02 = .094

04 = .119

06 = .146

08 = .173

10 = .198

14 = .265


56 = .328

38 = .390

"UL" LISTING *E32244

"CSA" LISTING *18689

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$

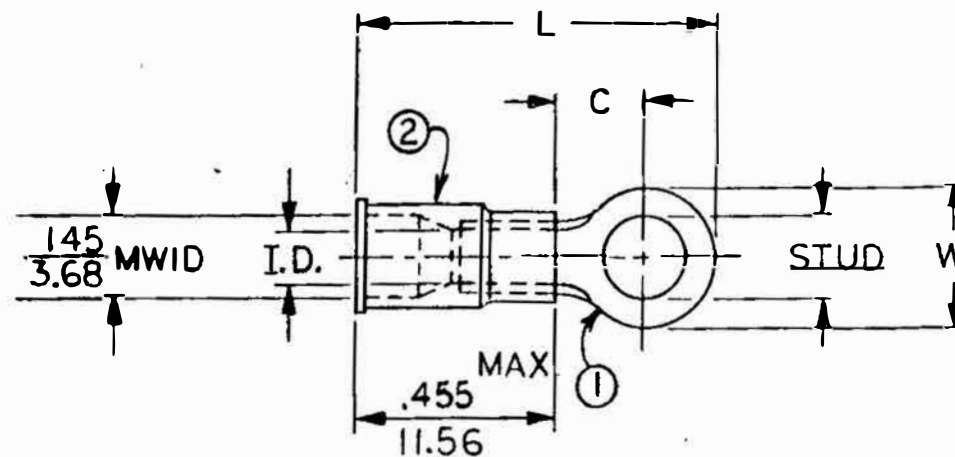

MWID = MAXIMUM WIRE
INSULATION DIAMETER

WIRE SIZE: 22-18 AWG
.25-1.5 MM²

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	"ID" MIN.			AVAILABLE STUD SIZES	STOCK THICKNESS	
	$\frac{.225}{5.71}$	$\frac{.157}{3.99}$	$\frac{.759}{19.28}$	$\frac{.062}{1.57}$			02X, 04X, 06X	$\frac{.028^{+.001}}{.71}$	
	$\frac{.312}{7.92}$	$\frac{.270}{6.86}$	$\frac{.946}{23.26}$	$\frac{.062}{1.57}$			06X, 08X, 10X	$\frac{.028^{+.001}}{.71}$	
R4A14S (M)	$\frac{.467}{11.86}$	$\frac{.386}{9.80}$	$\frac{1.110}{28.19}$	$\frac{.062}{1.57}$			10X, 14X, 56X	$\frac{.028^{+.001}}{.71}$	
	$\frac{.534}{13.56}$	$\frac{.552}{14.02}$	$\frac{1.309}{33.25}$	$\frac{.054}{1.37}$			10X, 14X, 56X, 38X	$\frac{.031^{+.001}}{.79}$	
	$\frac{.254}{6.45}$	$\frac{.240}{6.10}$	$\frac{.857}{21.77}$	$\frac{.062}{1.57}$			04X, 06X, 08X	$\frac{.028^{+.001}}{.71}$	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED			REFERENCE	SCALE: NTS	DATE	TITLE:	RING TONGUE TERMINAL INSULKRIMP 200-SERIES		
FRAC.	DEC.	ANG.		DRWN. BY: K-	10-23-84				
				CHKD. BY: GZ	11-9-84				
				APPRD. BY:					
							DWG. NO.	A	CUSTOMER DWG.