

SWITCHES - PUSH-PULL




35-331



35-306



35-330

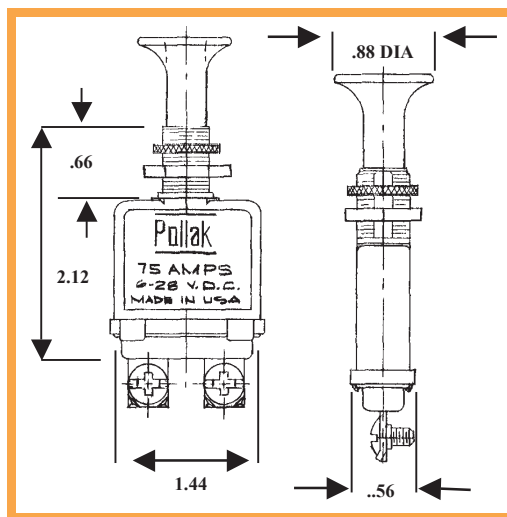

35-306

6-28 VOLTS - 75 AMP D.C. 2 POSITION S.P.S.T. OFF-ON Die-Cast Body, CHROME PLATED, Knob, Copper Terminals, Mounting Stem 5/8" long, 15/32" Diameter

35-331

Same as 35-306 with Red Metal Knob

35-330

Same as 35-306 with Black Metal Knob

35-319

Same as 35-306 except the hardware is assembled on the switch.

35-308

3 POSITION OFF-ON-ON, 5 terminals, Ivory Plastic Knob, Mounting Stem, 5/8" Long, 7/16" diameter, 30 Amps @ 6V 15 Amps @ 12V


35-316

3 POSITION 12V OFF-ON-ON Combination Rheostat, Panel and Headlight. Push Pull for Headlights, Turn to Dim Panel. With 20 Amp Circuit Breaker, 5 Terminals, Bright Metal Knob, Mounting Stem 3/8" Long, 3/8" diameter.


35-300

2 POSITION OFF-ON 25 Amp at 6V 15 Amps at 12V. Mounting Stem 5/8" Long 7/16" diameter. Ivory Plastic Knob.


35-308



35-300



35-316



35-320



52-642

Mating Connector



2 Position Off-On (Normally Off) – One Circuit. Rugged Nylon housing and mounting bracket. Bushing .59" long, .59 diameter Silver plated brass terminals mate with Mating Connector #52-642. Panel mount or transmission shaft mount (when used as a single speed axle switch)

MARINE

33-400

3 POSITION OFF-ON-BOTH ON FOR CONTROLLING RUNNING LIGHTS, etc. Large 3/4" diameter. Face Nut of POLISHED CHROME. Brass Back Nut and Washer. CHROME PLATED plastic knob. Mounting Stem 1-1/4" Long 7/16" diameter.

33-402


2 POSITION 25 Amps at 6V 15 Amps at 12V OFF-ON POLISHED CHROME Face Nut and CHROME PLATED plastic knob. Brass Back Nut and Washer. Mounting Stem 1-1/4" Long, 3/8" diameter.

33-403

3 POSITION OFF-ON-ON Two Separate Circuits. Brass Back Nut and Washer. BRASS CHROME PLATED Knob and Face Nut. Mounting Stem 1-1/4" Long, 3/8" diameter.



33-400



33-402



33-403

33-403

3 POSITION OFF-ON-ON Two Separate Circuits. Brass Back Nut and Washer. BRASS CHROME PLATED Knob and Face Nut. Mounting Stem 1-1/4" Long, 3/8" diameter.