

## PVC Trailer Cable



Trailer Cable

### Freeze-Flex Trailer Cable (PVC)

Freeze-Flex Trailer Cable remains flexible at -65°C (-85°F) and withstands temperatures of up to 60°C (140°F). Freeze-Flex copper content exceeds the SAE J1128 requirement, and the black PVC outer jacket resists abrasion as well as chemicals, gasoline, diesel fuel, ozone and ultra-violet.

#### 50' (15.2m)

Part No.	Conductors/ Gauge	O.D.	Stranding	Yellow	Red	Green	Brown	Black	Blue	White
769086	4/14	.444"	41 x .010"	✓	✓	✓	✓			
769091	6/14	.562"	41 x .010"	✓	✓	✓	✓	✓		✓
769084	7/14	.562"	41 x .010"	✓	✓	✓	✓	✓	✓	
769083	6/14, 1/12	.565"	41 x .010" (14 ga.) 65 x .010" (12 ga.)	✓	✓	✓	✓	✓	✓	✓
769096	6/12, 1/10	.601"	65 x .010" (12 ga.) 105 x .010" (10 ga.)	✓	✓	✓	✓	✓	✓	✓


#### 100' (30.5m)

769087	4/14	.444"	41 x .010"	✓	✓	✓	✓			
769092	6/14	.562"	41 x .010"	✓	✓	✓	✓	✓		✓
769094	7/14	.562"	41 x .010"	✓	✓	✓	✓	✓	✓	✓
769099	6/14, 1/12	.565"	41 x .010" (14 ga.) 65 x .010" (12 ga.)	✓	✓	✓	✓	✓	✓	✓
769097	6/12, 1/10	.601"	65 x .010" (12 ga.) 105 x .010" (10 ga.)	✓	✓	✓	✓	✓	✓	✓

#### Larger Spools

Bulk*	Approximate Spool Quantity	Conductors/ Gauge	O.D.	Stranding	Yellow	Red	Green	Brown	Black	Blue	White
769088B	1900-2100FT	4/14	.444"	41 x .010"	✓	✓	✓	✓			
769093B	1200-1500FT	6/14	.562"	41 x .010"	✓	✓	✓	✓	✓		✓
769095B	1900-1100FT	7/14	.562"	41 x .010"	✓	✓	✓	✓	✓	✓	✓
769128B	1000-1300FT	6/14, 1/12	.565"	41 x .010" (14 ga.) 65 x .010" (12 ga.)	✓	✓	✓	✓	✓	✓	
769098B	1000-1300FT	6/12, 1/10	.601"	65 x .010" (12 ga.) 105 x .010" (10 ga.)	✓	✓	✓	✓	✓	✓	✓

\* Call elecDirect.com for exact spool lengths on cost saving bulk spools. Customers will be billed by the foot for the exact amount that is on the spool.

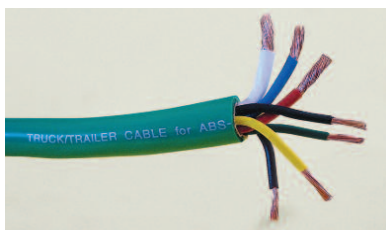

769494 ABS Trailer Cable (PVC)

### ABS Trailer Cable (PVC)

elecDirect.com's ABS trailer cable is designed specifically for the ABS brake system's power requirements on single or multiple trailer configurations. This trailer cable meets and exceeds SAE J2394 cable requirements. PVC outer jacket is abrasion and oil resistant and remains flexible at -40°C (-40°F). Green outer jacket. 1/8, 2/10, 4/12

#### 50' (15.2m)

Part No.	Conductors/ Gauge	O.D.	Stranding	Yellow	Red	Green	Brown	Black	Blue	White
769494	4/12, 2/10, 1/8	.680"	65 x .010" (12 ga.) 105 x .010" (10 ga.) 168 x .010" (8 ga.)	✓	✓	✓	✓	✓	✓	✓

#### 100' (30.5m)

Part No.	Conductors/ Gauge	O.D.	Stranding	Yellow	Red	Green	Brown	Black	Blue	White
769493	4/12, 2/10, 1/8	.680"	65 x .010" (12 ga.) 105 x .010" (10 ga.) 168 x .010" (8 ga.)	✓	✓	✓	✓	✓	✓	✓

#### APPROXIMATELY 500'-900' (152m-275m)

Part No.	Conductors/ Gauge	O.D.	Stranding	Yellow	Red	Green	Brown	Black	Blue	White
769492*	4/12, 2/10, 1/8	.680"	65 x .010" (12 ga.) 105 x .010" (10 ga.) 168 x .010" (8 ga.)	✓	✓	✓	✓	✓	✓	✓

\* Call elecDirect.com for exact spool lengths on cost saving bulk spools. Customers will be billed by the foot for the exact amount that is on the spool.