




# HOLDER FOR CLASS CC CYLINDRICAL FUSES

30 A / 600 V, CLASS CC

## AMBUS® EasySwitch Class CC

For Class CC fuses in compliance with UL 248-4 up to 30A. Compliant with American standard with a shortcircuit capacity of up to 200 kA. Versions with LED indicator are available.

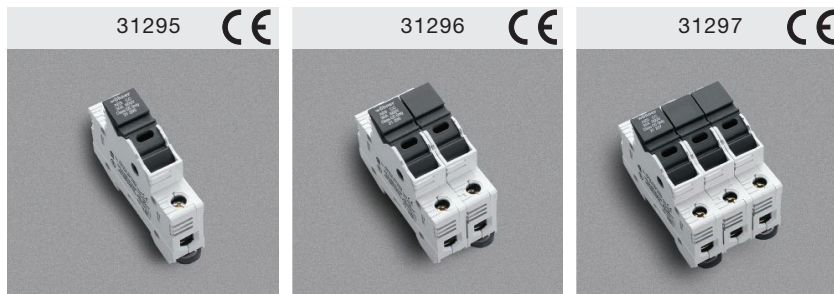

	31295	31296	31297
<b>Description</b>	Art. No.: 31295 Ambus EasySwitch Class CC holder for cylindrical fuses Class CC 1-pole	Art. No.: 31296 Ambus EasySwitch Class CC holder for cylindrical fuses Class CC 2-pole	Art. No.: 31297 Ambus EasySwitch Class CC holder for cylindrical fuses Class CC 3-pole
<b>Standards</b>	UL 512 CSA C22.2 No. 39	UL 512 CSA C22.2 No. 39	UL 512 CSA C22.2 No. 39
<b>Approvals</b>	GOST, CSA, UL (approved for feeder circuits to UL 508A up to 600 V) Type No.: AES CC 	GOST, CSA, UL (approved for feeder circuits to UL 508A up to 600 V) Type No.: AES CC 	GOST, CSA, UL (approved for feeder circuits to UL 508A up to 600 V) Type No.: AES CC 
<b>Electrical Data</b>	30 A, 600 V (60 Hz) <b>Rated insulation voltage: 800 V</b>  For fuse links Class CC to UL 248-4	30 A, 600 V (60 Hz) <b>Rated insulation voltage: 800 V</b>  For fuse links Class CC to UL 248-4	30 A, 600 V (60 Hz) <b>Rated insulation voltage: 800 V</b>  For fuse links Class CC to UL 248-4
<b>Mechanical Data</b>	<b>Width x Height x Depth (mm):</b> 18 x 81 x 58 <b>Weight (kg/100):</b> 6,6  <b>Fastening method:</b> clip-on mounting	<b>Width x Height x Depth (mm):</b> 36 x 81 x 58 <b>Weight (kg/100):</b> 13,1  <b>Fastening method:</b> clip-on mounting	<b>Width x Height x Depth (mm):</b> 54 x 81 x 58 <b>Weight (kg/100):</b> 19,9  <b>Fastening method:</b> clip-on mounting
<b>Pack Size</b>	12	6	4