

ALUMINUM MECHANICAL TAPS • TYPE GPT




GPT



UL486B
LISTED
AL9CU



Fabricated from high strength aluminum alloy extrusion. 100% reusable, using a hex wrench. Sliding retainer allows easy installation on run conductor. Finish electro-tin plated to assure minimum contact resistance and protection against corrosion when used with copper wire (for added protection, apply Penn-Union Cual-Aid® to cable, before installation).

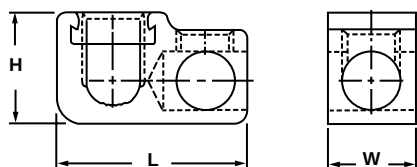

GPT


Parallel and "T" Tap

Catalog Number	Conductor Range		Approximate Dimensions		
	Main	Tap	H	W	L
Parallel Taps*			In.	In.	In.
GPT-2	12 Sol.-2 Str.	14 Sol.-4 Str. CU 12 Sol.-4 Str. AL	$\frac{7}{8}$	$\frac{5}{8}$	$1\frac{25}{64}$
GPT-1/0	2 Str.-1/0 Str.	14 Sol. 1/0 Str. CU 12 Sol.-1/0 Str. AL	1	$\frac{3}{4}$	$1\frac{3}{4}$
GPT-250-0	1/0 Str.-250 MCM	14 Sol.-1/0 Str. CU 12 Sol.-1/0 Str. AL	$1\frac{5}{16}$	$1\frac{1}{16}$	$2\frac{1}{32}$
GPT-250	1/0 Str.-250 MCM	6 Str.-250 MCM	$1\frac{5}{16}$	$1\frac{1}{16}$	$2\frac{9}{32}$
GPT-350	4/0 Str.-350 MCM	6 Str.-350 MCM	$1\frac{7}{16}$	$1\frac{1}{4}$	$2\frac{9}{16}$
GPT-500	350-500 MCM	2 Str.-500 MCM	$1\frac{3}{4}$	$1\frac{3}{8}$	$3\frac{1}{8}$
GPT-750	500-750 MCM	2 Str.-500 MCM	2	$1\frac{1}{2}$	$3\frac{3}{8}$

*For taps packaged with covers add suffix "-WC"

COVERS • TYPE GTC

Insulating covers for GPT connectors



Manufactured from 105°C rated material, 600 volt maximum rated.

Catalog Number	Cover for Model Number	Color	Approximate Dimensions		
			H	W	L
GTC-2	GPT-2	Yellow	$1\frac{7}{64}$	$1\frac{29}{32}$	$2\frac{7}{32}$
GTC-1/0	GPT-1/0	Gray	$1\frac{1}{4}$	$2\frac{5}{32}$	$2\frac{5}{8}$
GTC-250	GPT-250	Red	$1\frac{5}{8}$	$2\frac{7}{8}$	$3\frac{7}{16}$
GTC-250	GPT-250-0	Red	$1\frac{5}{8}$	$2\frac{7}{8}$	$3\frac{7}{16}$
GTC-350	GPT-350	Yellow	$1\frac{3}{4}$	$3\frac{3}{16}$	$3\frac{3}{4}$
GTC-500	GPT-500	Blue	$2\frac{3}{32}$	$3\frac{5}{16}$	$4\frac{3}{8}$
GTC-750	GPT-750	Orange	$2\frac{11}{32}$	$3\frac{7}{16}$	$4\frac{5}{8}$