



M TYPE METAL CORD GRIPS

Material: Nickel-plated brass
Fixture pack: PA (NYLON), UL 94
Hermetic seal: NBR
O-Seal ring: NBR
Protection degree: IP68-10 pressure (Rotate position)
Working temperature: -40°C to 100°C
 Instantaneous heat resistance up to 120°C

RoHS  **IP68** TÜV  IP69K
PRODUCT SERVICE

 US
 LISTED
 E360400

 US
 UL FILE NO.: E360400

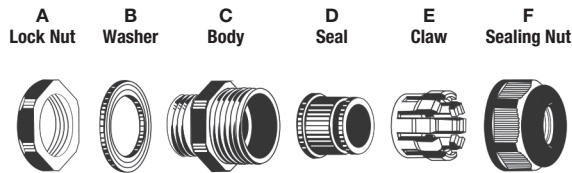

Part No.	AG	Clearance Hole +0.010	Cord/Cable Range Inch	H		GL			
				mm	inch	mm	inch	mm	inch
BRMC12AA*	M 12 x 1,5	0.49	.12 - .26	19	.748	10	.394	14	.551
BRMC12AR*	M 12 x 1,5	0.49	.08 - .20	19	.748	10	.394	14	.551
BRMC16AA*	M 16 x 1,5	0.63	.19 - .39	22	.866	10	.394	20	.787
BRMC16AR*	M 16 x 1,5	0.63	.07 - .24	21	.827	10	.394	17/19	.669/.748
BRMC20AA	M 20 x 1,5	0.79	.24 - .47	23	.906	10	.394	22	.866
BRMC20AR	M 20 x 1,5	0.79	.20 - .35	23	.906	10	.394	22	.866
BRMC25AA	M 25 x 1,5	0.98	.51 - .71	26	1.024	12	.472	30	1.181
BRMC25AR	M 25 x 1,5	0.98	.35 - .63	26	1.024	12	.472	30	1.181
BRMC32AA	M 32 x 1,5	1.26	.70 - .98	31	1.220	12	.472	40	1.575
BRMC32AR	M 32 x 1,5	1.26	.50 - .79	31	1.220	12	.472	40	1.575
BRMC40AA	M 40 x 1,5	1.58	.87 - 1.26	37	1.457	15	.591	50	1.969
BRMC40AR	M 40 x 1,5	1.58	.79 - 1.02	37	1.457	15	.591	50	1.969
BRMC50AA	M 50 x 1,5	1.97	1.26 - 1.50	37	1.457	15	.591	57	2.244
BRMC50AR	M 50 x 1,5	1.97	.98 - 1.22	37	1.457	15	.591	57	2.244

