



CORD GRIPS

NPT TYPE METAL CORD GRIPS

Material: Nickel-plated brass
Fixture pack: PA (NYLON), UL 94
Hermetic seal: NBR
O-Seal ring: NBR
Protection degree: IP68-10 pressure (Rotate position)
Working temperature: -40°C to 100°C
 Instantaneous heat resistance up to 120°C

RoHS CE IP68 TÜV IP69K
PRODUCT SERVICE

C UL US LISTED E360400
 C RA US * UL FILE NO.: E360400

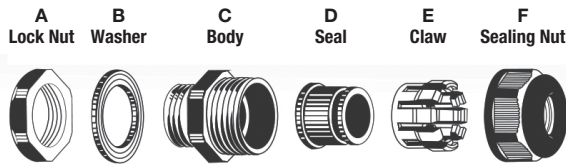

Part No.	AG	Clearance Hole +0.010	Cord/Cable Range Inch	H		GL		W	
				mm	inch	mm	inch	mm	inch
BRC09NA*	3/8" NPT	0.65	.15 - .32	21	.827	15	.591	17/19	.669/.748
BRC09NR*	3/8" NPT	0.65	.07 - .24	21	.827	15	.591	17/19	.669/.748
BRC13NA	1/2" NPT	0.81	.23 - .47	24	.945	13	.512	22/24	.748/.945
BRC13NR	1/2" NPT	0.81	.19 - .35	24	.945	13	.512	22/24	.748/.945
BRC21NA	3/4" NPT	1.02	.51 - .71	25	.984	13	.512	30	1.181
BRC21NR	3/4" NPT	1.02	.35 - .63	25	.984	13	.512	30	1.181
BRC29NA	1" NPT	1.275	.70 - .98	29	1.142	19	.748	40	1.575
BRC29NR	1" NPT	1.275	.47 - .79	29	1.142	19	.748	40	1.575

