



PG TYPE METAL CORD GRIPS

Material: Nickel-plated brass
Fixture pack: PA (NYLON), UL 94
Hermetic seal: NBR
Protection degree: IP68-10 pressure (Rotate position)
Working temperature: -40°C to 100°C in static state
 Instantaneous heat resistance up to 120°C

RoHS CE IP68 TÜV IP69K
PRODUCT SERVICE

UL US LISTED E360400
 UL US UL FILE NO.: E360400

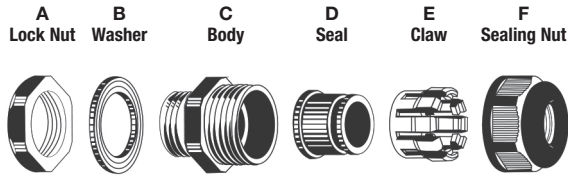

Part No.	AG	Clearance Hole +0.010	Cord/Cable Range Inch	H		GL		Wrench	
				mm	inch	mm	inch	mm	inch
BRC07AA*	PG 7	0.49	.11 - .26	19	.748	10	.394	14	.551
BRC07AR*	PG 7	0.49	.07 - .20	19	.748	10	.394	14	.551
BRC09AA*	PG 9	0.60	.15 - .32	21	.827	10	.394	17	.669
BRC09AR*	PG 9	0.60	.07 - .24	21	.827	10	.394	17	.669
BRC11AA*	PG 11	0.73	.19 - .39	22	.866	10	.394	20	.787
BRC11AR*	PG 11	0.73	.11 - .28	22	.866	10	.394	20	.787
BRC13AA	PG 13,5	0.83	.23 - .47	24	.945	10	.394	22	.866
BRC13AR	PG 13,5	0.83	.19 - .35	24	.945	10	.394	22	.866
BRC16AA	PG 16	0.90	.39 - .56	23	.906	10	.394	24	.945
BRC16AR	PG 16	0.90	.27 - .47	23	.906	10	.394	24	.945
BRC21AA	PG 21	1.13	.51 - .71	24	.945	12	.472	30	1.181
BRC21AR	PG 21	1.13	.35 - .63	24	.945	12	.472	30	1.181
BRC29AA	PG 29	1.47	.70 - .98	29	1.142	12	.472	40	1.575
BRC29AR	PG 29	1.47	.47 - .79	29	1.142	12	.472	40	1.575
BRC36AA	PG 36	1.87	.87 - 1.26	35	1.378	15	.591	50	1.969
BRC36AR	PG 36	1.87	.79 - 1.02	35	1.378	15	.591	50	1.969

