



# HC10NR 1A-30A Fast-Acting Fuses Class CC



**Standard:** UL 248-4

**INTERRUPTING CAPACITY :** 200,000 A  
at 600V AC (1A-30A)  
20,000 A at 300V DC (1A-30A)


**TECHNICAL PARAMETERS :**

SKU:	OEM PART NO.	CURRENT RATING	SAFETY APPROVALS
			cULus
CCFA-01	10NR1U6	1A	●
	10NR1.25U6	1.25A	●
	10NR1.5U6	1.5A	●
	10NR1.6U6	1.6A	●
CCFA-02	10NR2U6	2A	●
	10NR2.5U6	2.5A	●
CCFA-03	10NR3U6	3A	●
	10NR3.15U6	3.15A	●
	10NR3.5U6	3.5A	●
	10NR4U6	4A	●
CCFA-05	10NR5U6	5A	●
	10NR6U6	6A	●
	10NR6.3U6	6.3A	●
	10NR7U6	7A	●
	10NR8U6	8A	●
	10NR9U6	9A	●
CCFA-10	10NR10U6	10A	●
	10NR12U6	12A	●
CCFA-15	10NR15U6	15A	●
	10NR16U6	16A	●
CCFA-20	10NR20U6	20A	●
CCFA-25	10NR25U6	25A	●
CCFA-30	10NR30U6	30A	●

U6 DENOTES FOR 600V AC  
● DENOTES FOR APPROVAL  
○ DENOTES FOR PENDING

**Dimensions :**

Unit: mm

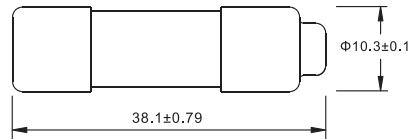

**ELECTRICAL CHARACTERISTICS:**

% of CURRENT RATING	BLOWING TIME
110%	15 minutes Min.
135%	1 hour Max.
200%	4 minutes Max.

**HC10NR**

AVERAGE I-T CHARACTERISTICS  
CURVE (FOR REFERENCE ONLY)

