

Sealed Key Switch with integral connector

- Engineering thermoplastic construction.
- Fully sealed contact area using O-rings and ultrasonic welding.

• Integral sealed Deutsch connector.

• Anti-restart option.

Features and Specifications

- Contact rating: 10A at 12V DC. 5A at 24V DC.
- Sealed: Contacts sealed front and back to IP67 (with connector installed.)
- Hardware: Plastic facenut and nickel-plated brass backing nut.
- Tested to SAE J259 for ignition switches.
- Supplied with two matching keys, with or without boot.
- · Custom logo can be molded on the boot.
- Multiple key codes or keyed alike available.




Functions and Circuits Available

Part Number	Positions					Spring Return*	With Key boot	With Anti-Restart
95060	4	Acc	Off	Ign/Acc	Start	Yes	Yes	
95060-01	4	Acc	Off	Ign/Acc	Start	Yes	Yes	Yes
95060-02	4	Acc	Off	Ign/Acc	Start	_	Yes	_
95060-03	3		Off	Ign/Acc	Start	Yes	Yes	_
95060-04	3		Off	Ign/Acc	Start	Yes	Yes	Yes
95060-05	3		Off	Ign/Acc	Start	_	Yes	_
95060-06	3	Acc	Off	Ign		_	Yes	_
95060-07	2		Off	Ign/Acc		_	Yes	_
ey is removable only at the Off position. *Spring return is to Ign/Acc position								

Switch Dimensions

0.850 [21.59]

Ø0.125 [3.18] 2 PL

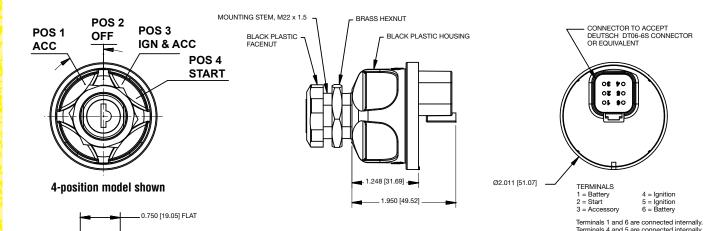

Battery Start Accessory Ignition Terminals 1 & 6 **Terminal 2** Terminal 3 Terminals 4 & 5 **Position 1 Position 2** Х **Position 3** Х Х Χ **Position 4**

