

Crimp/Solder/Shrink Terminals & Connectors

The ultimate Electrical Connection. Crimp for maximum reliability, solder for strength and conductivity and seal for superior durability. Meets or exceeds the most stringent OEM standards.



Butt Connectors (Crimp/Solder/Shrink)



24-22GA



761753 25 pk
761753B 500 pk

22-18GA



761750 25 pk
761750B 500 pk

16-14GA



761751 25 pk
761751B 500 pk

12-10GA



761752 25 pk
761752B 500 pk

Ring Terminals (Crimp/Solder/Shrink)



22-18GA



Stud Size #6
761767 25 pk
761767B 500 pk



Stud Size #8
761768 25 pk



Stud Size #10
761769 25 pk



Stud Size 1/4"
761770 25 pk



Stud Size 5/16"
761771 25 pk
761771B 500 pk



Stud Size 3/8"
761772 25 pk
761772B 500 pk

16-14GA



Stud Size #6
761764 25 pk
761764B 500 pk



Stud Size #8
761762 25 pk
761762B 500 pk



Stud Size #10
761754 25 pk
761754B 500 pk



Stud Size 1/4"
761755 25 pk
761755B 500 pk



Stud Size 5/16"
761760 25 pk
761760B 500 pk



Stud Size 3/8"
761758 25 pk
761758B 500 pk

12-10GA



Stud Size #6
761765 25 pk



Stud Size #8
761763 25 pk



Stud Size #10
761756 25 pk
761756B 500 pk



Stud Size 1/4"
761757 25 pk
761757B 500 pk



Stud Size 5/16"
761761 25 pk



Stud Size 3/8"
761759 25 pk
761759B 500 pk



Stud Size 1/2"
761766 25 pk
761766B 500 pk

Crimp/Solder/Shrink Terminals & Connectors

Spade/Fork Terminals (Crimp/Solder/Shrink)



22-18GA



Stud Size #6
761779 25 pk
761779B 500 pk



Stud Size #8
761782 25 pk



Stud Size #10
761785 25 pk

16-14GA



Stud Size #6
761780 25 pk



Stud Size #8
761783 25 pk



Stud Size #10
761786 25 pk

12-10GA



Stud Size #6
761781 25 pk



Stud Size #8
761784 25 pk
761784B 500 pk



Stud Size #10
761787 25 pk

Quick Disconnects/Slide Connectors (Crimp/Solder/Shrink)



22-18GA



Female quick disconnect
 Fully Insulated, Tab Size: 0.25"
761773 25 pk

16-14GA



Female quick disconnect
 Fully Insulated, Tab Size: 0.25"
761774 25 pk
761774B 500 pk

12-10GA



Female quick disconnect
 Fully Insulated, Tab Size: 0.25"
761775 25 pk

22-18GA



Male quick disconnect
 Tab Size: 0.25"
761776 25 pk

16-14GA



Male quick disconnect
 Tab Size: 0.25"
761777 25 pk
761777B 500 pk

12-10GA



Male quick disconnect
 Tab Size: 0.25"
761778 25 pk


Solder/Shrink Heat Shrinkable Terminals & Connectors

Advantages of using "Solder/Shrink" Terminals and Connectors


- Translucent, adhesive lined polyolefin tubing allows visual inspection, prevents corrosion, and provides a waterproof seal.
- Colour coded tubing with wire gauge imprint provides easy identification of the correct part for the job.
- A soldered connection provides superior electrical current flow and tensile strength.
- Easy installation with pre-measured solder—eliminates the crimping process.




1. Join Connecting Wires



2. Insert



3. Heat



4. Superior Electrical Connection with Waterproof Seal

Crimp/Solder/Shrink Terminals & Connectors

Provides the ultimate electrical connection in three easy steps.

Meets or exceeds the most stringent OEM standards.

Here's how...

Crimp

- Mechanically Reliable
- Easy to Install

Solder


- Additional Strength
- Better Conductivity

Shrink

- Durable Insulation
- Watertight Connection
- Transparent Tubing for Visual Inspection
- Provides a Seal Against Corrosion



1. Insert

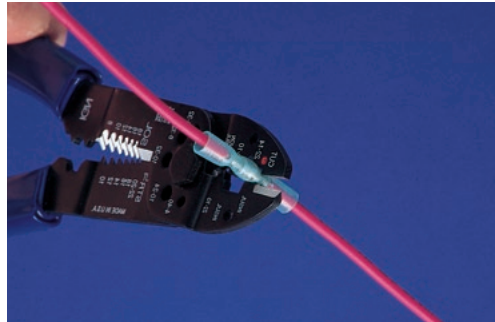

2. Crimp



3. Heat



4. Ultimate Electrical Connection with Waterproof Seal