




Tel: (450) 449-0412 ; 1-866-540-0412 Fax: (450)449-9115 ; 1-866-499-9115




DX SERIES

25000 VA, PART # : DX 25000PHU

ELECTRICAL SPECIFICATIONS

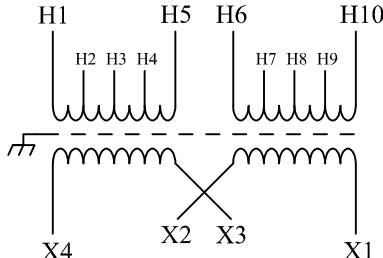PHASE:	1	PRIMARY VOLTAGE		SECONDARY VOLTAGE							
FREQ.:	60 Hz.	240/480 2, 2 ½ % ANFC, 2, 2 ½ % BNFC		120/240							
INSUL. CLASS	H(180°C)										
TEMP. RISE	< 115°C										
								PRIMARY VOLTS	CONNECT PRIMARY LINES TO	INTER-CONNECT	CONNECT SECONDARY LINES TO
								240	H1 - H10	H1 to H7 H10 to H4	
								480	H1 - H10	H4 to H7	
		SECONDARY VOLT									
		120		X1 to X3 X2 to X4	X1 - X4						
		240		X2 to X3	X1 - X4						

MECHANICAL SPECIFICATIONS: (Dimensions = inches).

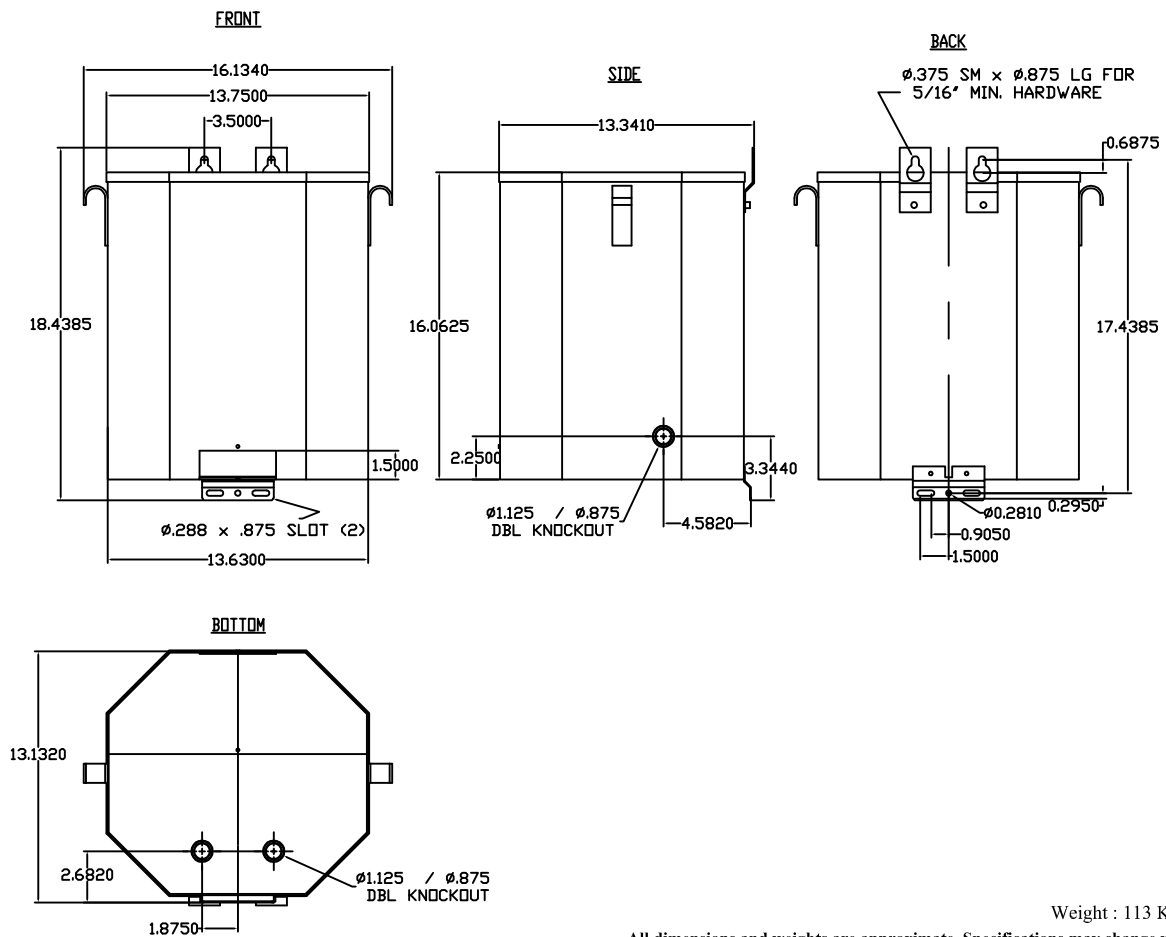

Weight : 113 Kg (250 lbs)

All dimensions and weights are approximate. Specifications may change without notice.

						TRANSFAB TMS magnetic solutions		MODEL NUMBER: DX 25000PHU	
ZONE	REV	REVISION	DESCRIPTION	DATE	APPROVAL	Drawn by:	SS	DWG NO.	71CUDX25000PHU-ENG
DATE: JANUARY/24/2013								PAGE: 1 of 1	