



HC10N 1A-30A Fast-Acting Fuses



Standard: UL 248


INTERRUPTING CAPACITY:

100,000 A at 600V AC (1A-30A)

10,000 A at 600V DC (1A-30A)

Dimensions:

Unit : mm

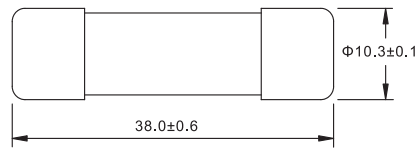

TECHNICAL PARAMETERS:

			SAFETY APPROVALS			
SKU:	OEM PART NO.	CURRENT RATING	UL		CUL	
			AC	DC	AC	DC
MGFA-01	10N1U6	1A	●	●	●	●
	10N1.25U6	1.25A	●	●	●	●
	10N1.5U6	1.5A	●	●	●	●
	10N1.6U6	1.6A	●	●	●	●
MGFA-02	10N2U6	2A	●	●	●	●
	10N2.5U6	2.5A	●	●	●	●
MGFA-03	10N3U6	3A	●	●	●	●
	10N3.15U6	3.15A	●	●	●	●
	10N3.5U6	3.5A	●	●	●	●
	10N4U6	4A	●	●	●	●
MGFA-05	10N5U6	5A	●	●	●	●
	10N6U6	6A	●	●	●	●
	10N6.3U6	6.3A	●	●	●	●
	10N7U6	7A	●	●	●	●
	10N8U6	8A	●	●	●	●
	10N9U6	9A	●	●	●	●
MGFA-10	10N10U6	10A	●	●	●	●
	10N12U6	12A	●	●	●	●
MGFA-15	10N15U6	15A	●	●	●	●
	10N16U6	16A	●	●	●	●
MGFA-15	10N20U6	20A	●	●	●	●
	10N25U6	25A	●	●	●	●
	10N30U6	30A	●	●	●	●


U6 DENOTES FOR 600V
● DENOTES FOR APPROVAL
○ DENOTES FOR PENDING

ELECTRICAL CHARACTERISTICS:

% of CURRENT RATING	BLOWING TIME
135%	1 hour Max.
200%	120 seconds Max.

HC10N

AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

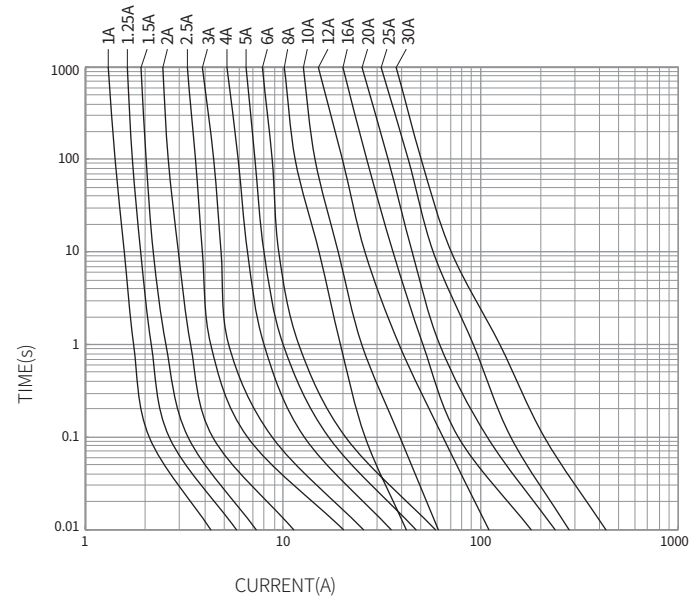

Recommended fuseblocks/fuseholders for 10.3mmx38mm fuses

SKU: 31130

