

## MAPO – HEAT SHRINK TUBING

Medium wall, adhesive lined, 3:1 shrink ratio, crosslinked polyolefin heat shrinkable tubing.

### DESCRIPTION

MAPO medium wall, heat shrinkable tubing is designed for insulating and sealing a variety of low voltage cable applications where lighter weight and greater flexibility are important. MAPO tubing is internally coated with a dual purpose thermoplastic liner which provides excellent insulating and environmental sealing protection for splices, connections, jacket repairs, and terminations. High impact and abrasion resistance.




### MAIN FEATURES

- Shrink Ratio of 3 to 1
- Environmentally seals
- 11 standard sizes in black only
- Heat Resistant & Mechanically Tough
- Standard 4 Ft. Lengths
- 600V Rated
- Continuous operating temperature -67°F to 230°F (-55°C to 110°C)



Part # (add your colour code) 4' PCS	Expanded (D) Internal Diameter		Recovered (d) Internal Diameter		Use with Wire Size (Approx)	(W) Wall Thickness	
	IN.	(mm)	IN.	(mm)		IN.	(mm)
MAPO-400-_-IIL	.400	(10.2)	.150	(3.8)	-	.080	(2.0)
MAPO-750-_-IIL	.750	(19.0)	.220	(5.6)	4-2/0 GA	.080	(2.0)
MAPO-1100-_-IIL	1.10	(27.9)	.400	(10.2)	1-3/0 GA	.095	(2.4)
MAPO-1300-_-IIL	1.30	(33.0)	.430	(11.0)	-	.095	(2.4)
MAPO-1500-_-IIL	1.50	(38.1)	.500	(12.7)	2/0-350MCM	.095	(2.4)
MAPO-1700-_-IIL	1.70	(43.2)	.566	(14.4)	-	.100	(2.5)
MAPO-2050-_-IIL	2.05	(52.1)	.750	(19.0)	250-350MCM	.100	(2.5)
MAPO-2750-_-IIL	2.75	(69.8)	1.00	(25.4)	600-1000MCM	.100	(2.5)
MAPO-3500-_-IIL	3.50	(88.9)	1.18	(30.0)	800-1250MCM	.100	(2.5)
MAPO-4700-_-IIL	4.70	(119.4)	1.57	(39.9)	1500-2500MCM	.105	(2.7)
MAPO-6700-_-IIL	6.70	(170.2)	2.30	(58.4)	-	.120	(3.0)

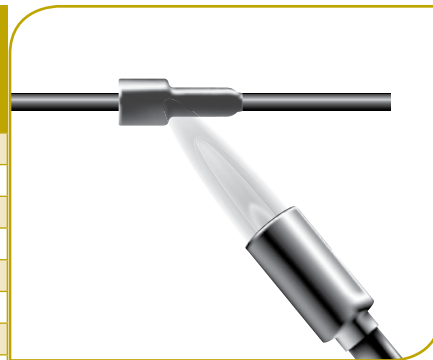

#### Colour Codes

- 0..... Black
- 2..... Red
- 9..... Clear

#### PACKAGE TYPES AVAILABLE

- 4 ft. lengths - boxed

#### INSTALLATION

When heated above 248°F (120°C), MAPO will shrink unrestricted to 33% (3:1) of its supplied diameter.



## HEAT SHRINK

Part No.	COLOUR	SIZE EXP.	SIZE REC.	CTN/QTY
<b>THIN WALL POLYOLEFIN H.S. IN 6" PCS</b>				
HSP0-062-0-6"	BLACK	1/16"	1/32"	6 PCS
HSP0-125-0-6"	BLACK	1/8"	1/16"	6 PCS
HSP0-187-0-6"	BLACK	3/16"	3/32"	6 PCS
HSP0-250-0-6"	BLACK	1/4"	1/8"	6 PCS
HSP0-375-0-6"	BLACK	3/8"	3/16"	6 PCS
HSP0-500-0-6"	BLACK	1/2"	1/4"	6 PCS
HSP0-750-0-6"	BLACK	3/4"	3/8"	6 PCS
HSP0-1000-0-6"	BLACK	1"	1/2"	6 PCS
<b>THIN-WALL POLYOLEFIN H.S. 100' ROLLS</b>				
HSP0-062-0-C	BLACK	1/16"	1/32"	100 FT
HSP0-125-0-C	BLACK	1/8"	1/16"	100 FT
HSP0-187-0-C	BLACK	3/16"	3/32"	100 FT
HSP0-250-0-C	BLACK	1/4"	1/8"	100 FT
HSP0-375-0-C	BLACK	3/8"	3/16"	100 FT
HSP0-500-0-C	BLACK	1/2"	1/4"	100 FT
HSP0-750-0-C	BLACK	3/4"	3/8"	100 FT
HSP0-1000-0-C	BLACK	1"	1/2"	100 FT
HSP0-1500-0-C	BLACK	1-1/2"	3/4"	100 FT
HSP0-2000-0-L	BLACK	2"	1"	50 FT

## BUTANE TORCH

MODEL #: 762099

- Ideal for heat shrink tubing
- Adjustable flame
- Butane not included
- Uses regular lighter butane refill



Heat Shrink Torch – Medium Duty

Part No.	COLOUR	SIZE EXP.	SIZE REC.	CTN/QTY
<b>MEDIUM WALL ADHESIVE LINED POLYOLEFIN H.S. IN 4 FT. LENGTHS</b>				
MAPO-400-0-IIL	BLACK	.40"	.15"	8 FT
MAPO-750-0-IIL	BLACK	.75"	.22"	8 FT
MAPO-1100-0-IIL	BLACK	1.10"	.40"	4 FT
MAPO-1300-0-IIL	BLACK	1.30"	.40"	4 FT
MAPO-1500-0-IIL	BLACK	1.50"	.50"	4 FT
MAPO-1700-0-IIL	BLACK	1.70"	.50"	4 FT
MAPO-2050-0-IIL	BLACK	2.05"	.75"	4 FT
MAPO-2750-0-IIL	BLACK	2.75"	1.00"	4 FT
MAPO-3500-0-IIL	BLACK	3.50"	1.18"	4 FT
MAPO-4700-0-IIL	BLACK	4.70"	1.57"	4 FT
MAPO-6700-0-IIL	BLACK	6.70"	2.30"	4 FT
MAPO-9000-0-IIL	BLACK	9.00"	3.00"	4 FT
<b>HEAVY WALL ADHESIVE LINED POLYOLEFIN H.S. IN 4 FT. LENGTHS</b>				
HAP0-350-0-IIL	BLACK	.35"	.12"	8 FT
HAP0-500-0-IIL	BLACK	.51"	.16"	8 FT
HAP0-750-0-IIL	BLACK	.75"	.24"	4 FT
HAP0-1100-0-IIL	BLACK	1.10"	.35"	4 FT
HAP0-1500-0-IIL	BLACK	1.50"	.47"	4 FT
HAP0-2000-0-IIL	BLACK	2.00"	.63"	4 FT
HAP0-2700-0-IIL	BLACK	2.68"	.87"	4 FT
HAP0-3500-0-IIL	BLACK	3.54"	1.18"	4 FT
HAP0-4700-0-IIL	BLACK	4.72"	1.57"	4 FT

## HEAT SHRINK GUN

MODEL#: HS-GUN

- Includes Hot Air Baffle
- 120 Volt
- 1200 Watt 4100 BTU
- 2 Stage (750° F, 1000° F)



Heat Shrink Gun – Flameless