

M TYPE NYLON CORD GRIPS

Material: PA (NYLON), UL 94
Hermetic seal: NBR
Protection degree: IP68, 5 Bar, IP69K
Working temperature: -40°C to 100°C in static state
 Instantaneous heat resistance up to 120°C
 -20°C to 80°C in dynamic state
 Instantaneous heat resistance up to 100°C
Colour: Grey, Black



RoHS

CE IP68 TÜV IP69K
PRODUCT SERVICE

UL US
 LISTED
 E360400

UL US
 UL FILE NO.: E360400

UL F1
 In Black colour only

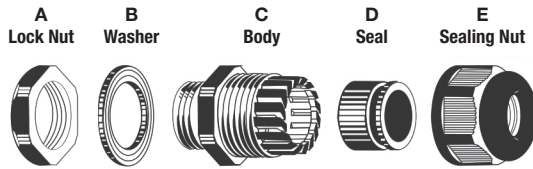

Part No. Black	Part No. Grey	AG	Clearance Hole +0.010	Cord/Cable Range Inch	H		GL		⚙	
					mm	inch	mm	inch	mm	inch
RDMC12AA*	RDMC12AA-GR*	M 12 x 1,5	0.49	.11 - .26	21	.827	15	.591	15	.591
RDMC12AR*	RDMC12AR-GR*	M 12 x 1,5	0.49	.07 - .20	21	.827	15	.591	15	.591
RDMC16AA*	RDMC16AA-GR*	M 16 x 1,5	0.63	.19 - .39	25	.984	15	.591	22	.866
RDMC16AR*	RDMC16AR-GR*	M 16 x 1,5	0.63	.11 - .28	25	.984	15	.591	22	.748
RDMC20AA	RDMC20AA-GR	M 20 x 1,5	0.79	.23 - .47	27	1.063	15	.591	24	.945
RDMC20AR	RDMC20AR-GR	M 20 x 1,5	0.79	.20 - .35	27	1.063	15	.591	24	.945
RDMC20AA1	RDMC20AA1-GR	M 20 x 1,5	0.79	.39 - .56	28	1.102	15	.591	27	1.063
RDMC25AA	RDMC25AA-GR	M 25 x 1,5	0.98	.51 - .71	31	1.220	15	.591	33	1.299
RDMC25AR	RDMC25AR-GR	M 25 x 1,5	0.98	.35 - .63	31	1.220	15	.591	33	1.299
RDMC32AA	RDMC32AA-GR	M 32 x 1,5	1.26	.70 - .98	39	1.535	15	.591	42	1.654
RDMC32AR	RDMC32AR-GR	M 32 x 1,5	1.26	.50 - .79	39	1.535	15	.591	42	1.654
RDMC40AA	RDMC40AA-GR	M 40 x 1,5	1.58	.87 - 1.26	48	1.890	18	.710	53	2.087
RDMC40AR	RDMC40AR-GR	M 40 x 1,5	1.58	.79 - 1.02	48	1.890	18	.710	53	2.087
RDMC50AA	RDMC50AA-GR	M 50 x 1,5	1.97	1.26 - 1.50	49	1.929	18	.710	60	2.362
RDMC50AR	RDMC50AR-GR	M 50 x 1,5	1.97	.98 - 1.22	49	1.929	18	.710	60	2.362

