



## NPT TYPE NYLON CORD GRIPS

**Material:** PA (NYLON), UL 94  
**Hermetic seal:** NBR  
**Protection degree:** IP68, 5 Bar, IP69K  
**Working temperature:** -40°C to 100°C in static state  
 Instantaneous heat resistance up to 120°C  
 -20°C to 80°C in dynamic state  
 Instantaneous heat resistance up to 100°C  
**Colour:** Grey, Black

RoHS CE IP68 TÜV  
PRODUCT SERVICE

UL US LISTED E360400  
 UL US \* UL FILE NO.: E360400  
 UL F1 In Black colour only

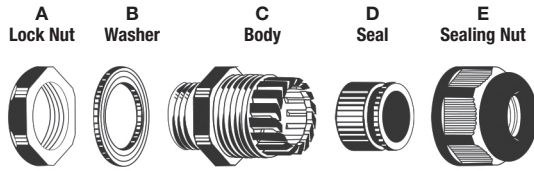

Part No. Black	Part No. Grey	AG	Clearance Hole +0.010	Cord/Cable Range Inch	H		GL		⚙	
					mm	inch	mm	inch	mm	inch
RDC09NA*	RDC09NA-GR*	3/8" NPT	0.65	.15 - .32	22	.866	15	.591	22/19	.866/.748
RDC09NR*	RDC09NR-GR*	3/8" NPT	0.65	.07 - .24	22	.866	15	.591	22/19	.866/.748
RDC13NA	RDC13NA-GR	1/2" NPT	0.81	.23 - .47	27	1.063	13	.512	24	.945
RDC13NR	RDC13NR-GR	1/2" NPT	0.81	.19 - .35	27	1.063	13	.512	24	.945
RDC16NA	RDC16NA-GR	1/2" NPT	0.81	.39-.56	28	1.102	13	.512	27	1.063
RDC16NR	RDC16NR-GR	1/2" NPT	0.81	.27 - .47	28	1.102	13	.512	27	1.063
RDC21NA	RDC21NA-GR	3/4" NPT	1.02	.51 - .71	31	1.220	14	.551	33	1.299
RDC21NR	RDC21NR-GR	3/4" NPT	1.02	.35 - .63	31	1.220	14	.551	33	1.299
RDC29NA	RDC29NA-GR	1" NPT	1.275	.70 - .98	39	1.535	19	.748	42	1.654
RDC29NR	RDC29NR-GR	1" NPT	1.275	.47 - .79	39	1.535	19	.748	42	1.654
RDC36NA	RDC36NA-GR	1-1/4" NPT		.71 - .98	39	1.535	16	.630	46/42	1.811/1.654
RDC36NR	RDC36NR-GR	1-1/4" NPT		.51 - .79	39	1.535	16	.630	46/42	1.811/1.654

