
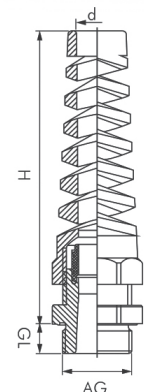


# NPT TYPE NYLON CORD GRIPS WITH STRAIN RELIEF

**Material:** PA (NYLON), UL 94  
**Hermetic seal:** NBR  
**Working temperature:** -40°C to 100°C in static state  
 Instantaneous heat resistance up to 120°C  
 -20°C to 80°C in dynamic state  
 Instantaneous heat resistance up to 100°C  
**Colour:** Grey, Black

RoHS  **IP68** TÜV IP69K  
PRODUCT SERVICE

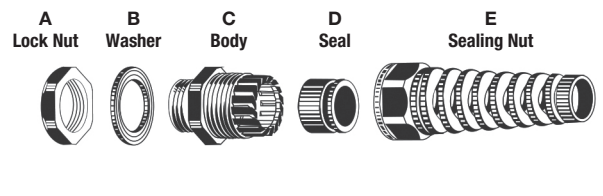

Part No. Black	Part No. Grey††	AG	Clearance Hole +0.010	Cord/Cable Range Inch	H		GL		d		⚙	
					mm	inch	mm	inch	mm	inch	mm	inch
RFC09NA*	RFC09NA-GR*	3/8" NPT	0.65	.15 - .32	63	2.480	15	.591	8,5	.334	22/19	.866/.748
RFC09NR*	RFC09NR-GR*	3/8" NPT	0.65	.07 - .24	63	2.480	15	.591	8,5	.334	22/19	.866/.748
RFC13NA	RFC13NA-GR	1/2" NPT	0.81	.23 - .47	90	3.543	13	.512	13	.512	24	.945
RFC13NR	RFC13NR-GR	1/2" NPT	0.81	.19 - .35	90	3.543	13	.512	13	.512	24	.945
RFC16NA	RFC16NA-GR	1/2" NPT	0.81	.39 - .56	100	3.937	13	.512	15,5	.610	27	1.063
RFC16NR	RFC16NR-GR	1/2" NPT	0.81	.27 - .47	100	3.937	13	.512	15,5	.610	27	1.063
RFC21NA	RFC21NA-GR	3/4" NPT	1.02	.50 - .71	114	4.488	14	.551	20	.787	33	1.299
RFC21NR	RFC21NR-GR	3/4" NPT	1.02	.35 - .63	114	4.488	14	.551	20	.787	33	1.299



†† Grey connectors with Strain Relief are Non-stock Items.