

RSE Miniature High Power Relay

Key Features

- 10A Switching Capacity
- Long Endurance (min. 100,000 electrical operations)
- Industry Standard 8 or 11 Pin Round Terminals
- Different Sockets Available
- RoHS compliant
- Outline Dimensions: 35.0 x 35.0 x 53.0mm



Options & Ordering Codes

RSE	2	PN		24VDC
Contact Arrangement				Coil Voltage
2 Pole Changeover (C0)	2			
3 Pole Changeover (C0)	3			
			Pin Configuration	
			Standard Configuration	
			Alternative Configuration (3 Pole only)	
		LED & Flag	PN	
			H	

Contact Data

Contact Arrangement	2P	3P
Contact Resistance	100mΩ (at 1A 24VDC)	
Contact Material	AgSnO ₂	
Contact Rating	10A 250VAC / 28VDC	NO: 10A 250VAC / 28VDC NC: 5A 250VAC / 28VDC
Max. Switching Voltage	250VAC / 28VDC	
Max. Switching Current	10A	
Max. Switching Power	2500VA / 280W	
Mechanical Life	1x10 ⁷ OPS	
Electrical Life	1x10 ⁵ OPS	

Coil

Coil Power	DC Type	1.5W
	AC Type	2.4VA

Coil Data

at 23°C

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Coil Resistance Ω
6	4.8	0.6	23.5 (1±10%)
12	9.6	1.2	95 (1±10%)
24	19.2	2.4	430 (1±10%)
48	38.4	4.8	1630 (1±10%)
100	80.0	10.0	6800 (1±10%)
110	88.0	11.0	7300 (1±10%)

Characteristics


Insulation Resistance		500mΩ (at 500VDC)
Dielectric Strength	Between Coil & Contacts	1500VAC 1min
	Between Open Contacts	1000VAC 1min
	Between Contact Sets	1500VAC 1min
Operate Time (at nominal voltage)		30ms max.
Release Time (at nominal voltage)		30ms max.
Ambient Temperature		-40°C to 55°C
Humidity		98% RH, +40°C
Vibration Resistance		10Hz to 55Hz 1.5mm DA
Shock Resistance	Functional	98m/s ²
	Destructive	980m/s ²
Unit Weight		Approx. 100g
Construction		Dust Protected

Nominal Voltage VAC (50/60Hz)	Pick-up Voltage VAC max.	Drop-out Voltage VAC min.	Coil Resistance Ω
6*	4.8	1.8	3.9 (1±10%)
12	9.6	3.6	16.9 (1±10%)
24*	19.2	7.2	70 (1±10%)
48*	38.4	14.4	315 (1±10%)
110	80.0	30.0	1500 (1±10%)
220	160.0	60.0	6200 (1±10%)
230	176.0	66.0	7100 (1±10%)


* Not suitable for 60Hz operation

RSE Miniature High Power Relay


SRRE8-M

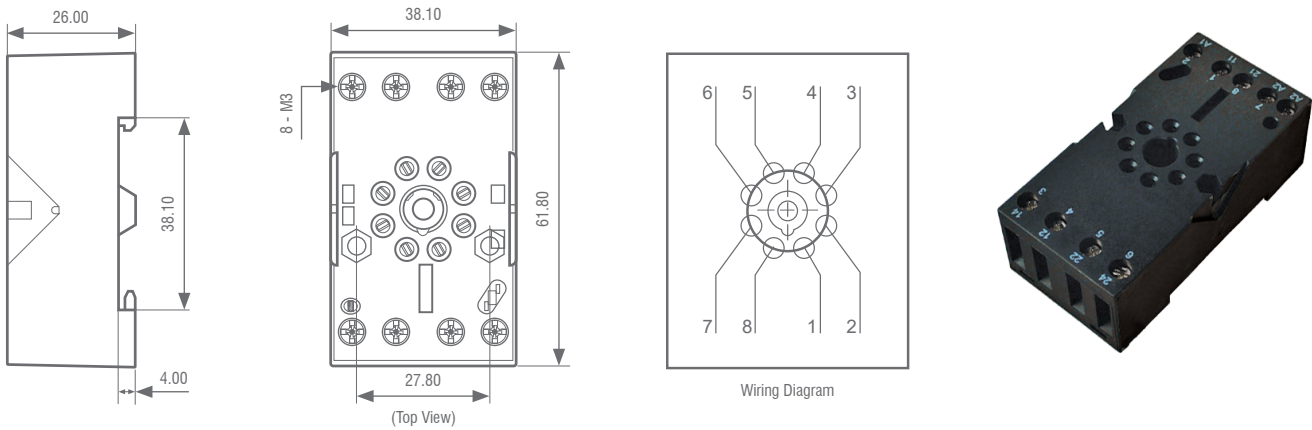


SRRE11

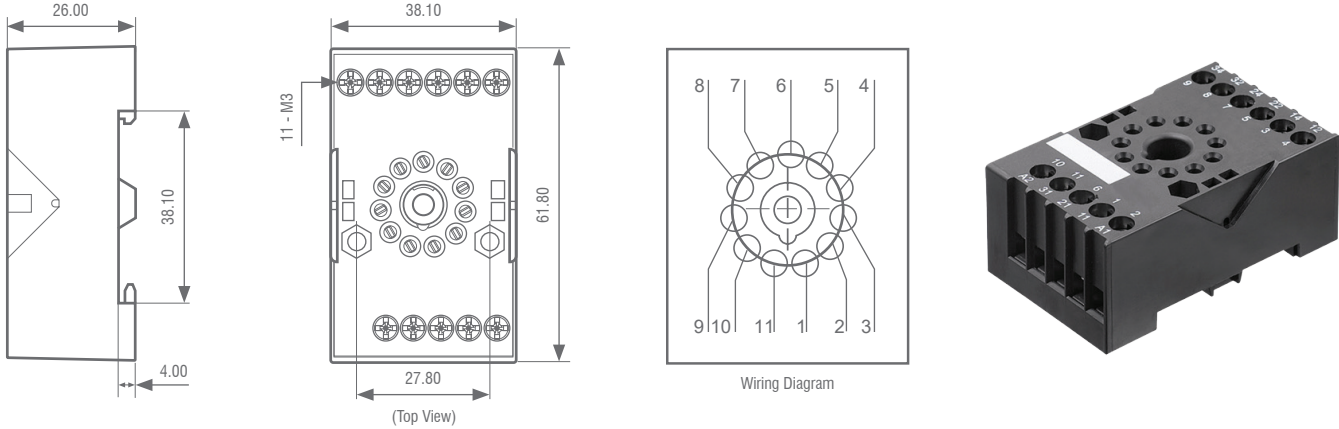

SRRE11-M

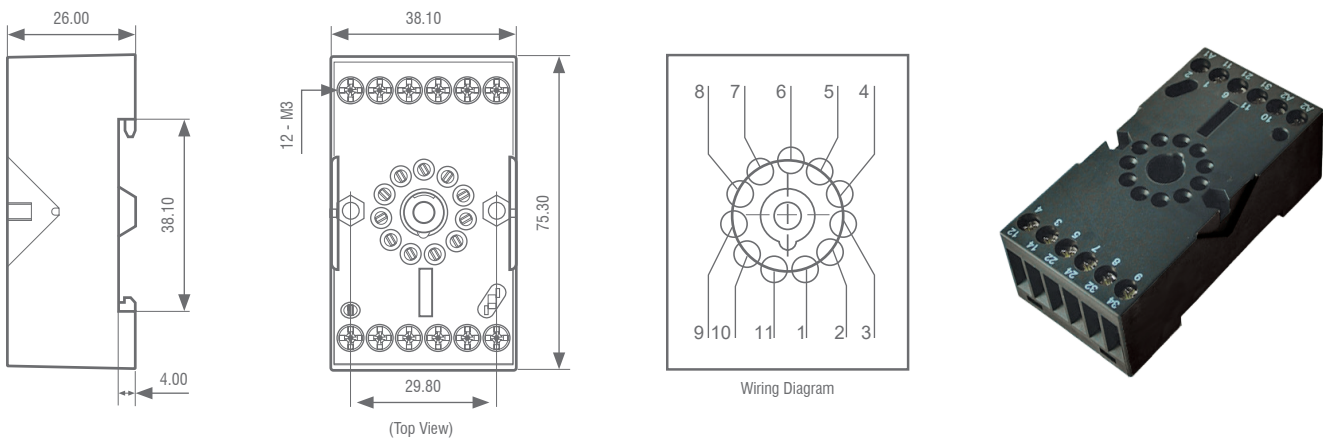


Retainer



Plug-In Modules

RPDME1

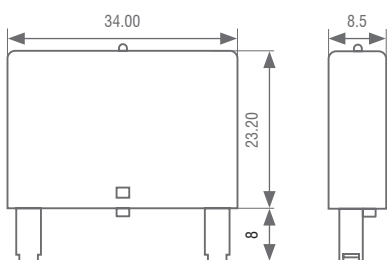

6-220VDC, Diode, -A1 to +A2
For SRRE8-M, SRRE11-M & Relays without LED