

CORD GRIPS

PG NYLON CORD GRIPS WITH STRAIN RELIEF

Material: PA (NYLON), UL 94

RoHS



IP68





IP69K

Hermetic seal: NBR

Working temperature: -40°C to 100°C in static state
Instantaneous heat resistance up to 120°C
-20°C to 80°C in dynamic state
Instantaneous heat resistance up to 100°C



Colour: Grey, Black

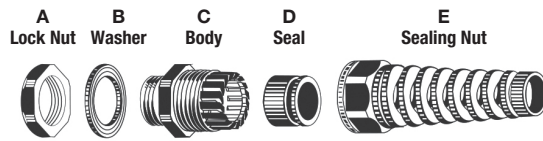

Part No. Black	Part No. Grey††	AG	Clearance Hole +0.010	Cord/Cable Range Inch	H		GL		d		⌀	
					mm	inch	mm	inch	mm	inch	mm	inch
RFC07AA*	RFC07AA-GR*	PG 7	0.49	.11 - .26	54	2.126	15	.591	7	.276	15	.591
RFC07AR*	RFC07AR-GR*	PG 7	0.49	.07 - .20	54	2.126	15	.591	7	.276	15	.591
RFC09AA*	RFC09AA-GR*	PG 9	0.60	.15 - .32	63	2.480	15	.591	8,5	.334	19	.748
RFC09AR*	RFC09AR-GR*	PG 9	0.60	.07 - .24	63	2.480	15	.591	8,5	.334	19	.748
RFC11AA*	RFC11AA-GR*	PG 11	0.73	.19 - .39	78	3.070	15	.591	10,5	.413	22	.866
RFC11AR*	RFC11AR-GR*	PG 11	0.73	.11 - .28	78	3.070	15	.591	10,5	.413	22	.866
RFC13AA	RFC13AA-GR	PG 13,5	0.83	.23 - .47	90	3.543	15	.591	13	.512	24	.945
RFC13AR	RFC13AR-GR	PG 13,5	0.83	.19 - .35	90	3.543	15	.591	13	.512	24	.945
RFC16AA	RFC16AA-GR	PG 16	0.90	.39 - .56	100	3.937	15	.591	15,5	.610	27	1.063
RFC16AR	RFC16AR-GR	PG 16	0.90	.27 - .47	100	3.937	15	.591	15,5	.610	27	1.063
RFC21AA	RFC21AA-GR	PG 21	1.13	.51 - .71	114	4.488	15	.591	20	.787	33	1.299
RFC21AR	RFC21AR-GR	PG 21	1.13	.35 - .63	114	4.488	15	.591	20	.787	33	1.299



†† Grey connectors with Strain Relief are Non-stock Items.