

## Warning Products – Strobe Beacons

### SENIOR STROBE (PLASTIC BASE)

Direct  
OEM  
Replace-  
ment



745212

Part No.		Qty/Pkg
745212	Amber, 12-24 Volts (1.5A @ 12V), 75 Double Flashes per Minute, 15.25 Joules. ABS Plastic Base with a Polycarbonate Inner Lens. Amber Outer Dome (Polycarbonate) is held to the lamp with a Stainless Steel Clamp Ring. Dimensions: 8¼" H x 8" Diameter. Surface Mount. SAE J845 Class 2	1 PC

#### REPLACEMENT PARTS FOR 745212

735450	Replacement Flashtube for 745212	1 PC
731908	Replacement Clear Outer Dome (Polycarbonate) for 745212	1 PC
731906	Replacement Inner Amber Lens (Polycarbonate) for 745212	1 PC

### JUNIOR/LOW PROFILE STROBE (DIE-CAST BASE)



745263

Part No.		Qty/Pkg
745263	Amber, 12 Volts (0.5A @ 12V), 65 Single Flashes per Minute, 3 Joules. Powder Coated Die-Cast Base, Polycarbonate Lens with Fully Encapsulated Circuitry. Dimensions: 4" H x 4⅞" Base Diameter. Surface Mount	1 PC

### JUNIOR/LOW PROFILE STROBES (PLASTIC BASE)

#### SURFACE MOUNT (14 JOULES)

- 12-24 Volts • 2.4 Amps • 70 High Power Double Flashes per Minute
- 14 Joules • Polycarbonate Lens • Plastic Flange Base
- Dimensions: 4½" H x 7" Base Diameter • SAE J1318 Class 2

Part No.		Qty/Pkg
745200	Clear Lens, Surface Mount	1 PC



745200

#### SURFACE MOUNT (10 JOULES)

- 12-24 Volts • 0.9 Amps • 75 Double Flashes per Minute
- 10 Joules • Polycarbonate Lens • Plastic Flange Base
- Dimensions: 4½" H x 7" Base Diameter • SAE J1318 Class 2

Part No.		Qty/Pkg
745201	Clear Lens, Surface Mount	1 PC
745202	Purple Lens, Surface Mount	1 PC



745201



745202

#### MAGNETIC MOUNT (10 JOULES)

- 12-24 Volts • 0.9 Amps • 75 Double Flashes per Minute
- 10 Joules • Polycarbonate Lens • Dimensions: 4½" H x 5" Base Diameter
- SAE J1318 Class 2
- Magnetic Mount versions include a 15' cord with a 12V Adapter Plug and a lighted rocker switch

Part No.		Qty/Pkg
745203	Clear Lens, Magnetic Mount	1 PC
745204	Purple Lens, Magnetic Mount	1 PC



745203



745204

#### REPLACEMENT PARTS FOR JUNIOR/LOW PROFILE STROBES WITH PLASTIC BASE

735191	Replacement Flashtube for 745200, 745201, 745202, 745203 & 745204	1 PC
731925	Replacement Clear Lens for 745200, 745201 & 745203	1 PC
731913	Replacement Purple Lens for 745202 & 745204	1 PC


# RECOMMENDED MOUNTING INSTRUCTIONS

## For Light Series - 745212

**\*\*\*Proper installation of this product is the sole responsibility of the installer\*\*\***

1. Locate a flat surface on vehicle and position light parallel to the ground.
2. In the interior of the vehicle, loosen upholstery at mounting location.
3. Use center-punch if available to start four (4) mounting holes - See diagram below.  
Drill the four holes out using a 1/4" drill bit.
4. Insert wire through center hole and position mounting bolts in holes.
5. Connect **red wire** to power (+) and **black wire** (if provided) to ground (-)
6. If black wire is not provided, light is grounded to a metal surface thru the mounting bolts
6. Follow wiring instructions for a switch if provided ----- TEST LIGHT
7. Install washers and hex nuts and tighten down mounting bolts until gasket seals light to the surface of the vehicle.
8. Replace upholstery to original position.

**All DFS900 series lights now include an internal solid state, self resetting fuse. The vehicle circuit providing power to this light should be fused for a minimum of 7.5 A per light. If more than one unit is used on the same circuit, the circuit should be fused for an additional 4 A minimum per unit.**

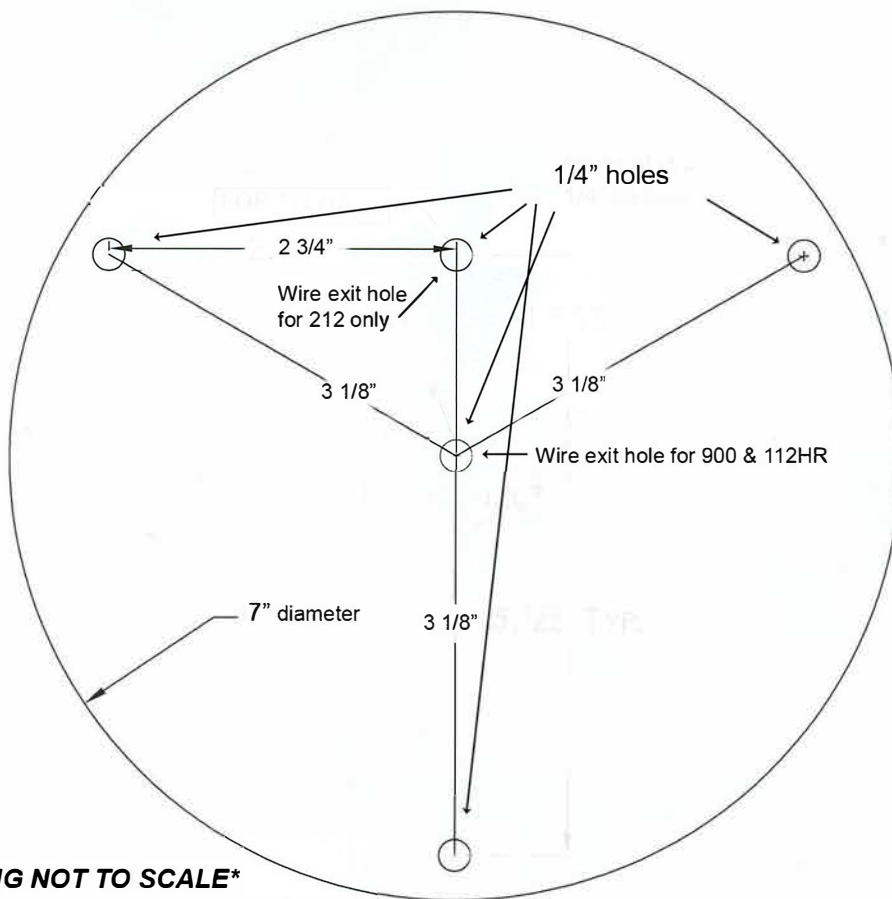

**\*DRAWING NOT TO SCALE\***

**\*\*\*\*\*CLEAN DOME WITH WATER ONLY\*\*\*\*\***

If you have purchased a magnet mount light be sure to check the owners manual for lighter/auxilliary socket maximum amperage rating before plugging in any warning light.