


Underground Watertight In-Line Splice

Type ULS

- Manufactured from high strength aluminum alloy and clear plated for low contact resistance and high conductivity
- Mechanical insulated splice for repairing or splicing aluminum or copper conductors in direct burial applications
- Pre-filled with oxide inhibitor
- Accepts wide conductor range
- Rated for 600V, 90°C applications
- Meets specifications:
 - ANSI 119.1
 - Western Underground Guide 2.5
 - ANSI 119.4 for Class A connectors
 - UL 486D

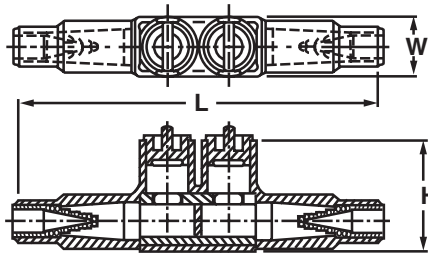

CATALOG NUMBER	CONDUCTOR RANGE	APPROXIMATE DIMENSIONS (IN.)		
		H	W	L
ULS2-350	12 - 350 kcmil	2.48	1.34	8.09