


EURO-DUCT – NARROW SLOT

Designed for terminal block and Din component applications with higher number of entries into the duct.

Wire ducts with 4 mm. slots

Material: Self-extinguishing rigid PVC Class 1 (UL94-VO)

RoHS certified.

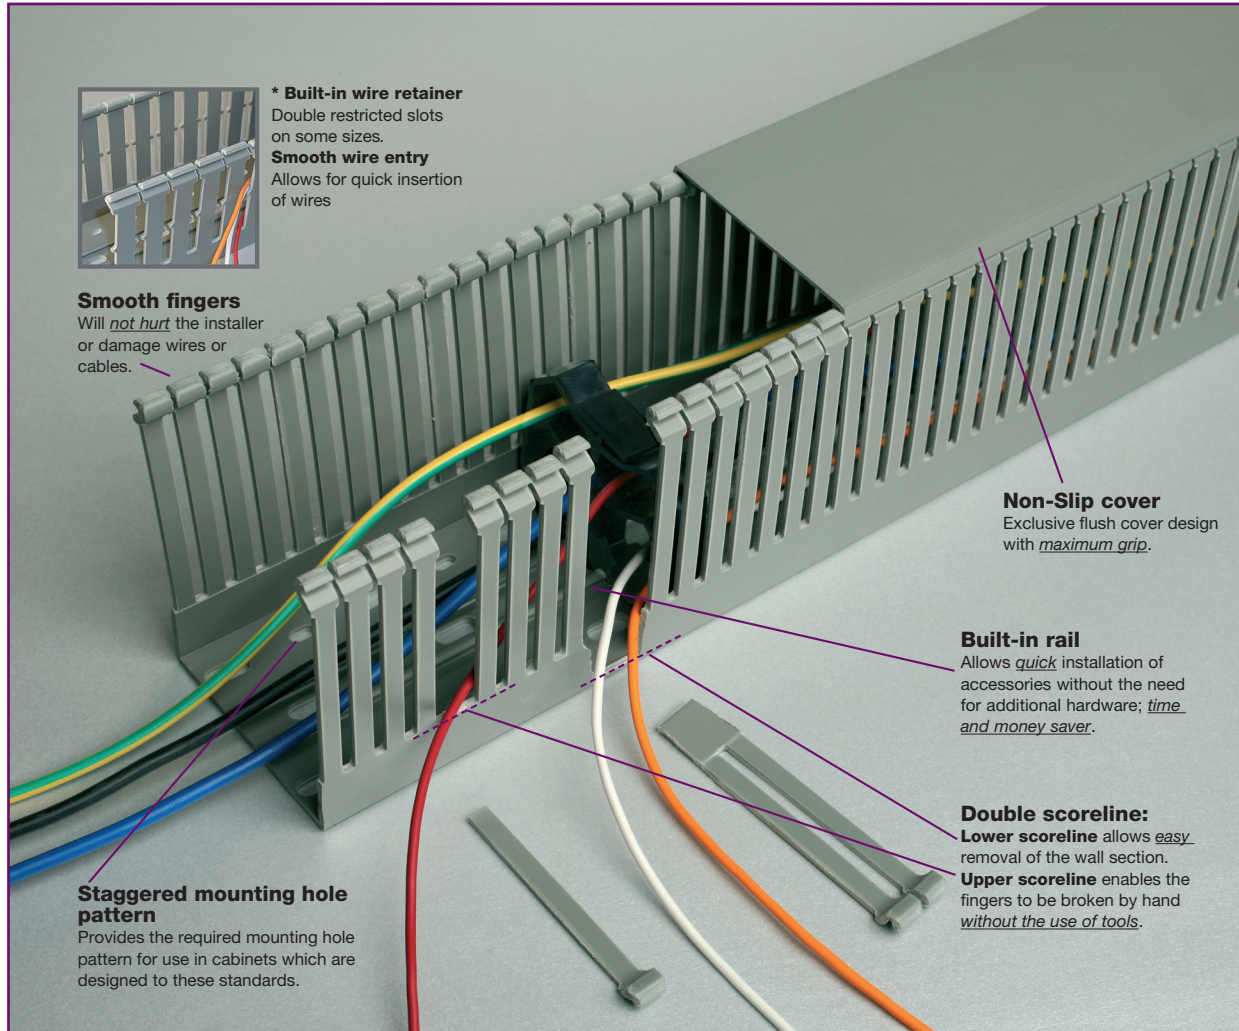


- All wiring ducts come complete with cover.

The RoHS Directive stands for "the restriction of the use of certain hazardous substances in electrical and electronic equipment". This Directive will ban the use on the EU market of new electrical and electronic equipment containing more than agreed levels of lead, cadmium, mercury, hexavalent chromium, polybrominated biphenyl (PBB) and polybrominated diphenyl ether (PBDE) flame retardants starting July 1, 2006.



Flush cover design with maximum grip.



Designed for use with several accessories: wire retainers, label holders etc.

Accessories


PTR



DMF *



SC



WT-1 – Duct Cutting Tool



Complete selection of accessories and tools for installation:
see pages D-8, 9

EURO-DUCT – NARROW SLOT

Wire ducts with 4 mm. slots
Lead free. RoHS certified.





Part Number	Duct Size WxH		Standard Carton Qty	Figure (Below)	(C) mm	(D) mm	(P) mm	Length		Accessories Selection	
	Inches	(mm)						ft	(mtr)	Cross-Arms	Separators
S2530C	0.98x1.18	25x30	40	1	4	6	10	6.56	2		
S2540C	0.98x1.57	25x40	30	1	4	6	10	6.56	2		
S2560C	0.98x2.36	25x60	20	1	4	6	10	6.56	2		
S2580C†	0.98x3.15	25x80	16	2	4	6	10	6.56	2		
S25100C	0.98x3.94	25x100	12	1	4	6	10	6.56	2		
S4040C	1.57x1.57	40x40	20	1	4	6	10	6.56	2	PTR	
S4060C	1.57x2.36	40x60	18	1	4	6	10	6.56	2	PTR	S2C
S4080C†	1.57x3.15	40x80	12	2	4	6	10	6.56	2	PTR	S4C
S40100C	1.57x3.94	40x100	8	1	4	6	10	6.56	2	PTR	
S6040C	2.36x1.57	60x40	24	1	4	6	10	6.56	2	PTR	S1C**-S3C
S6060C	2.36x2.36	60x60	12	1	4	6	10	6.56	2	PTR	S2C
S6080C†	2.36x3.15	60x80	12	2	4	6	10	6.56	2	PTR	S4C
S60100C	2.36x3.94	60x100	8	1	4	6	10	6.56	2	PTR	
S8040C	3.15x1.57	80x40	12	1	4	6	10	6.56	2	PTR	S1C**-S3C
S8060C	3.15x2.36	80x60	12	1	4	6	10	6.56	2	PTR	S2C
S8080C†	3.15x3.15	80x80	12	2	4	6	10	6.56	2	PTR	S4C
S80100C	3.15x3.94	80x100	8	1	4	6	10	6.56	2	PTR	S5C
S10060C	3.94x2.36	100x60	10	1	4	6	10	6.56	2	PTR	S2C
S10080C†	3.94x3.15	100x80	8	2	4	6	10	6.56	2	PTR	S4C
S100100C	3.94x3.94	100x100	8	1	4	6	10	6.56	2	PTR	S5C
S12060C	4.72x2.36	120x60	8	1	4	6	10	6.56	2	PTR	S2C

† Built-in Wire Retainer

S1**= double separator


PLEASE CALL FOR PRODUCT AVAILABILITY

TECHNICAL DATA






COLOUR:

G = Grey



SIZES AND LAYOUT OF HOLES ON THE BOTTOM

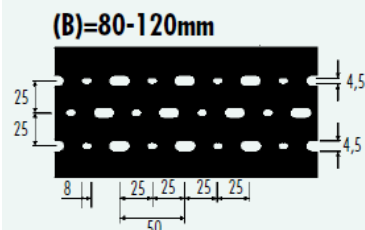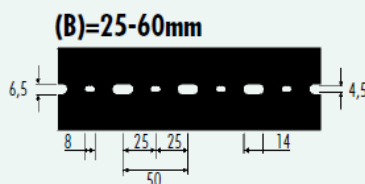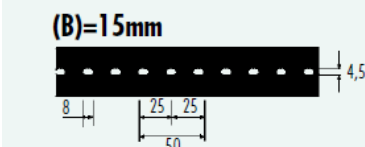


AMERI-DUCT – WIDE SLOT

Wiring ducts with large fingers and larger slots for easy insertion of larger wires and cables.

Wire ducts with 8 mm. slots

Material: Self-extinguishing rigid PVC Class 1 (UL94-VO)
RoHS certified.

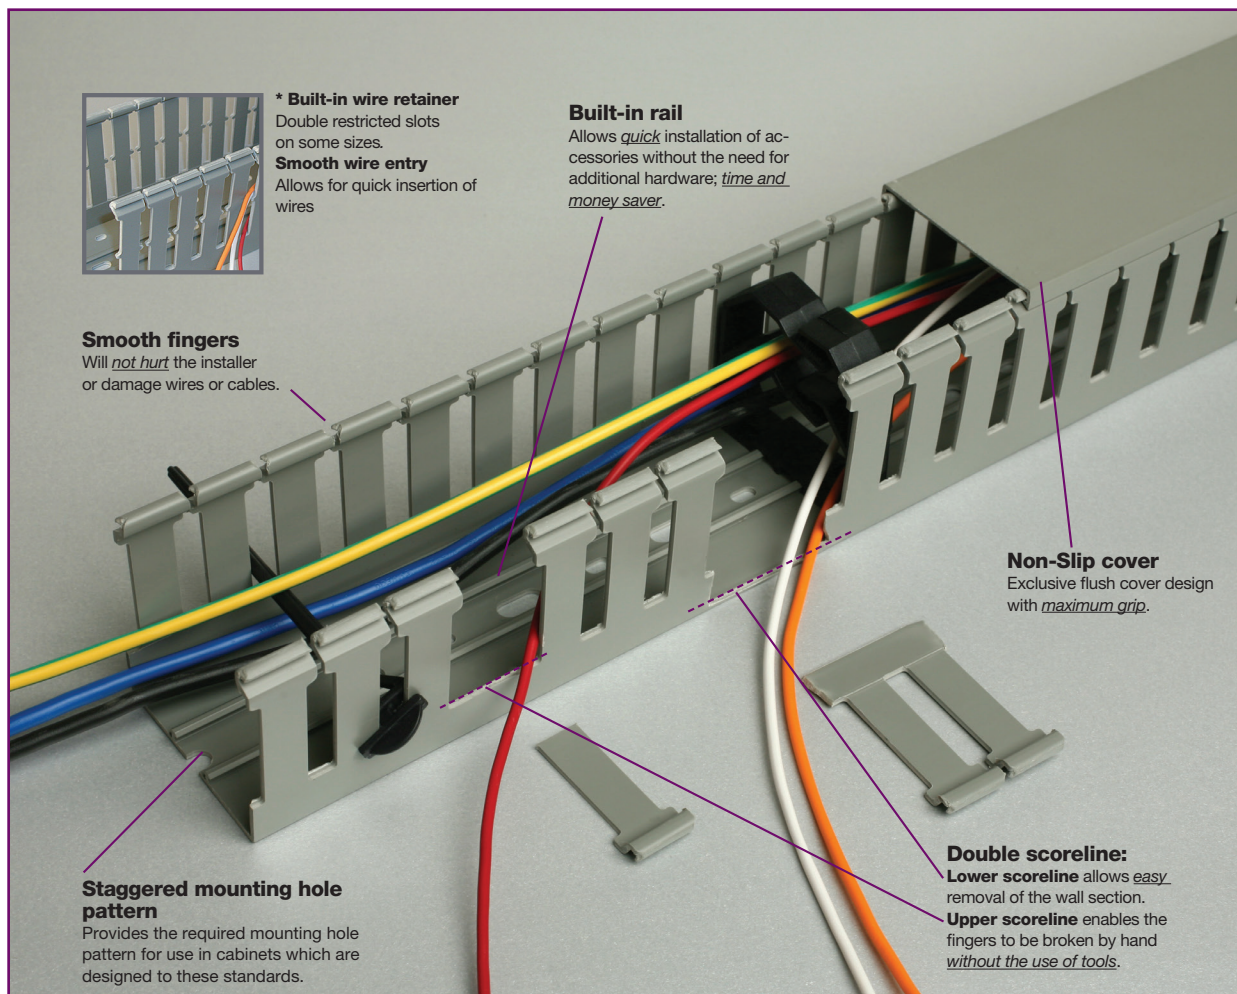

- All wiring ducts come complete with cover.

Accessories

The RoHS Directive stands for "the restriction of the use of certain hazardous substances in electrical and electronic equipment". This Directive will ban the use on the EU market of new electrical and electronic equipment containing more than agreed levels of lead, cadmium, mercury, hexavalent chromium, polybrominated biphenyl (PBB) and polybrominated diphenyl ether (PBDE) flame retardants starting July 1, 2006.


PTR



DMF *



SC



WT-1 – Duct Cutting Tool



AMERI-DUCT – WIDE SLOT

Wire ducts with 8 mm. slots
Lead free. RoHS certified.




Part Number	Duct Size WxH		Standard Carton Qty	Figure (Below)	(C) mm	(D) mm	(P) mm	Length	Accessories Selection	
	Inches	(mm)							Cross-Arms	Separators
A2530C	0.98x1.18	25x30	40	1	8	12	20	6.56 (2)		
A2540C	0.98x1.57	25x40	30	2	8	12	20	6.56 (2)		
A2560C	0.98x2.36	25x60	20	1	8	12	20	6.56 (2)	PTR	
A2580C†	0.98x3.15	25x80	16	2	8	12	20	6.56 (2)	PTR	S2C
A25100C†	0.98x3.94	25x100	12	2	8	12	20	6.56 (2)	PTR	S4C
A4030C	1.57x1.18	40x30	24	1	8	12	20	6.56 (2)	PTR	
A4040C	1.57x1.57	40x40	20	1	8	12	20	6.56 (2)	PTR	S1C**-S3C
A4060C	1.57x2.36	40x60	18	1	8	12	20	6.56 (2)	PTR	S2C
A4080C†	1.57x3.15	40x80	12	2	8	12	20	6.56 (2)	PTR	S4C
A40100C†	1.57x3.94	40x100	8	2	8	12	20	6.56 (2)	PTR	
A6030C	2.36x1.18	60x30	16	1	8	12	20	6.56 (2)	PTR	S1C**-S3C
A6040C	2.36x1.57	60x40	24	1	8	12	20	6.56 (2)	PTR	S2C
A6060C	2.36x2.36	60x60	12	1	8	12	20	6.56 (2)	PTR	S4C
A6080C†	2.36x3.15	60x80	12	2	8	12	20	6.56 (2)	PTR	S5C
A60100C†	2.36x3.94	60x100	8	2	8	12	20	6.56 (2)	PTR	S2C
A8040C	3.15x1.57	80x40	12	1	8	12	20	6.56 (2)	PTR	S4C
A8060C	3.15x2.36	80x60	12	1	8	12	20	6.56	PTR	S5C
A8080C†	3.15x3.15	80x80	12	2	8	12	20	6.56	PTR	S2C
A80100C†	3.15x3.94	80x100	8	2	8	12	20	6.56		
A10040C	3.94x1.57	100x40	8	1	8	12	20	6.56		
A10060C	3.94x2.36	100x60	10	1	8	12	20	6.56		
A10080C†	3.94x3.15	100x80	8	1	8	12	20	6.56		
A100100C†	3.94x3.94	100x100	8	2	8	12	20	6.56		
A100150C†	3.94x5.91	100x150	4	3	20	30	50	6.56		
A12060C	4.72x2.36	120x100	8	1	8	12	20	6.56		
A150100C†	5.91x3.94	150x100	4	2	8	12	20	6.56		

† Built-in Wire Retainer


S1**= double separator

PLEASE CALL FOR PRODUCT AVAILABILITY

TECHNICAL DATA

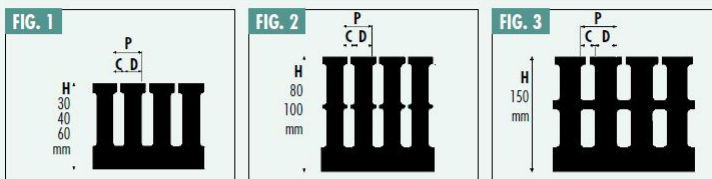


SIZES AND LAYOUT OF HOLES ON THE BOTTOM

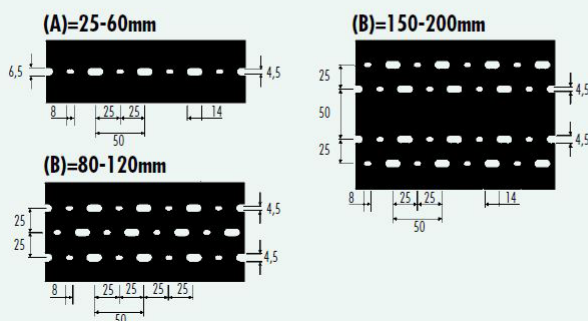

COLOUR:

G = Grey



CORNER EDGE DUCT

Modular angular trunking for cabling.

Material: Self-extinguishing rigid PVC Class 1 (UL94-VO) RoHS certified.




Patented:

N° 00246688

MI99U000250

23/04/1999

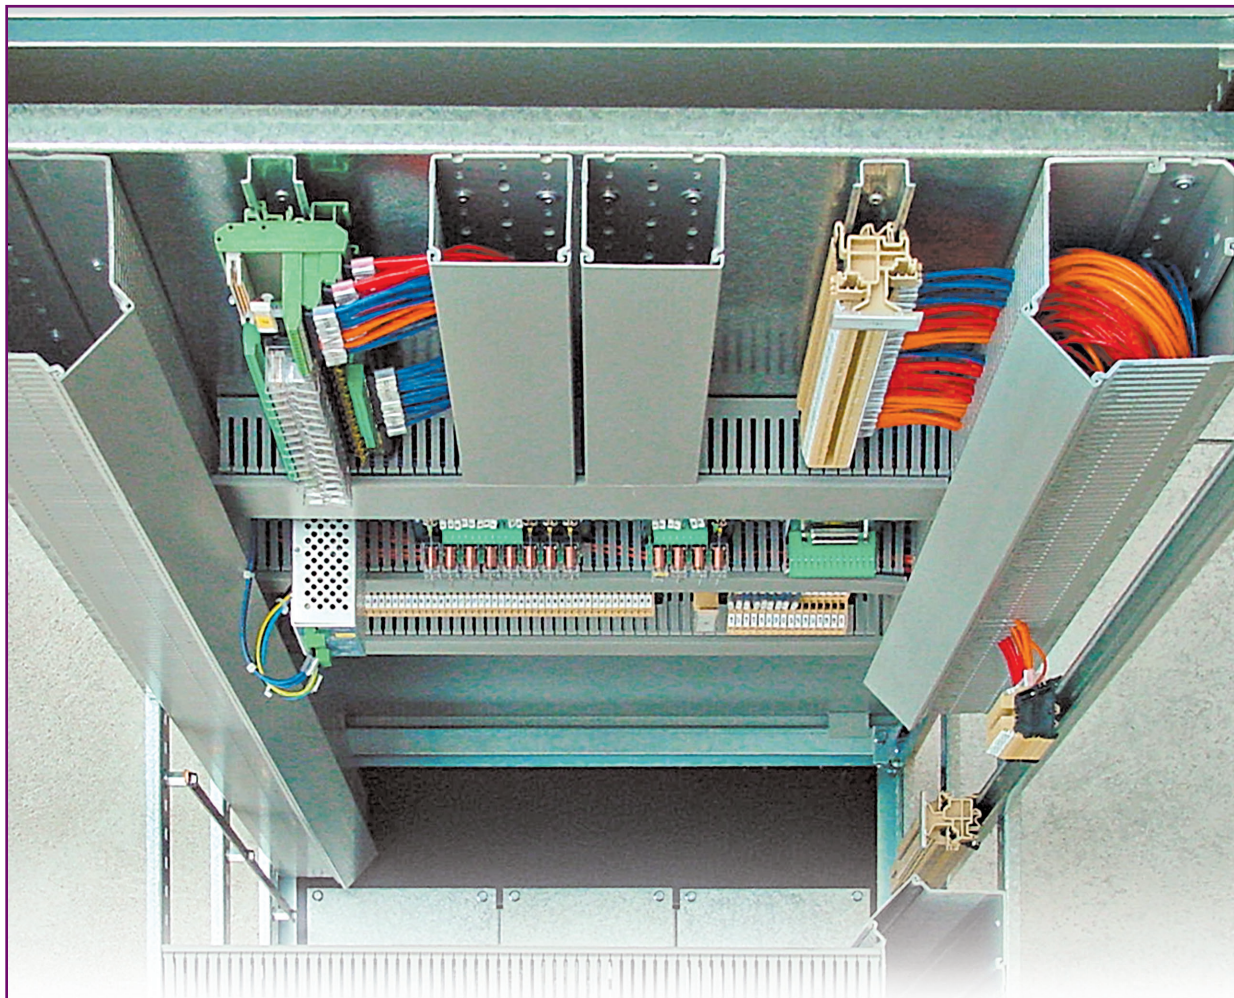

COLOUR:



G = Grey

CORNER EDGE DUCT

Modular angular trunking for cabling.

Material: Self-extinguishing rigid PVC Class 1 (UL94-VO)

RoHS certified.



Part Number	Duct Size WxH		Standard Carton Qty	Length	
	Inches	(mm)		ft	(mtr)
S1106080	4.33x2.36x3.15	110x60x80	4	6.56	2
S904060	4.33x1.57x3.15	90x40x80	4	6.56	2





Designed for use with several accessories: wire retainers, label holders etc.

Advantages of the system.

The Edge wire duct is designed to be used on the very corner of the enclosure where the space is normally not utilized. This system allows wires and cables to be routed professionally to the lateral panels.

Features of the EDGE ducts.


Available with cover opening of 40 and 60 mm (90 x 90 mm, 110 x 110 mm) and useful sections of 9000 and 11,050 mm². Just changing the "L" shaped bottom piece and keeping the same side wall, you will get a big saving on the ducts and stocking costs, beside getting an increase in wire fill capacity inside the electrical panel.

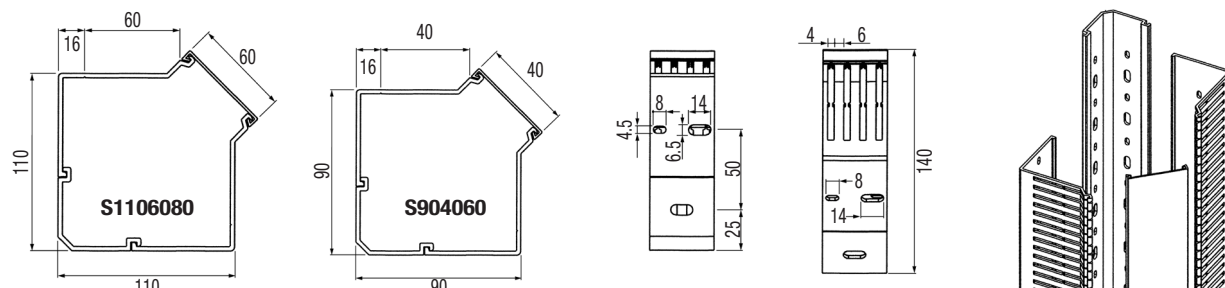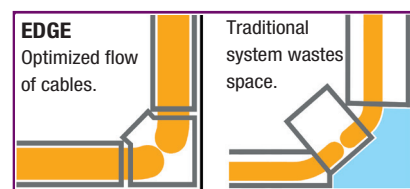

Installation.

Connecting the two slotted walls, 4 mm slots, you have the possibility of use the bottom and side panels for the fixing of instruments and terminals. You can avoid strange applications that, to get the same result, need the fixing of the traditional duct on corner clamps, a solution that restricts the space available for cables.


(fig. A)

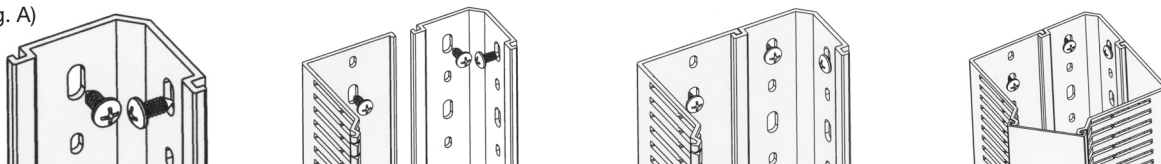

Fix the corner profile between the panels, with 2-4 rivets (RIV1) or screw per meter (see fig. A). Set the slotted walls under the profile and in the suitable groove. Fix the panel with 2-4 rivets (RIV1) per meter. Fix the cover by pressing. To hold back the wires, use the cross arm TR4-TR6 not supplied.

Accessories

PTR



WT-1 – Duct Cutting Tool

Complete selection of accessories and tools for installation:
see pages D-8, 9

DUCT ACCESSORIES

PTE


Part Number	CP Type	PCS Package
PTE	PTE	250 (5x50)

PLEASE CALL FOR PRODUCT AVAILABILITY

Label Holder.

For Type E - A wire ducts.

COLOUR: ☐ Transparent

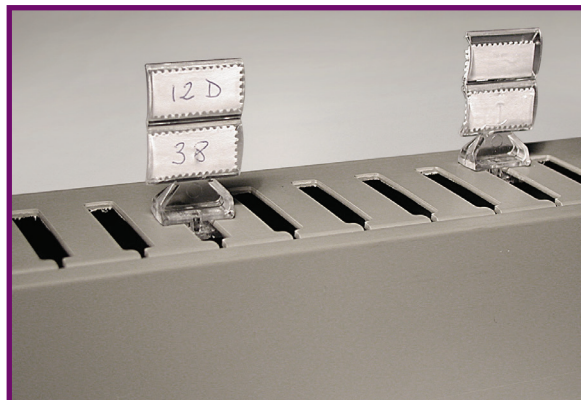

PTR

Part Number	CP Type	PCS Package
PTR	PTR	100 (4x25)

PLEASE CALL FOR PRODUCT AVAILABILITY

Cross arm for Type E - A trunkings.



RIV1 / RIV2

Part Number	Ø in.	Ø mm.	PCS Package
RIV1	0.25	6.5	1000 (5x200)
RIV2	0.18	4.5	1000 (5x200)


PLEASE CALL FOR PRODUCT AVAILABILITY

Rivets. To fix the ducts to panels.


Material: Nylon

COLOUR: RIV1 ☒ Black

RIV2 ☒ Green

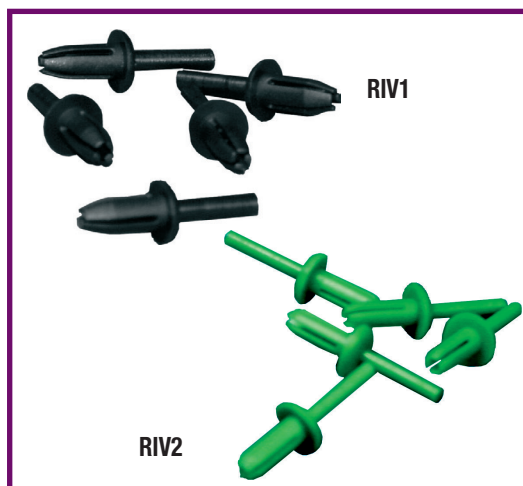

Type	A	B	C	D
RIV1	11.3	6	2	10
RIV2	10	4.5	3	8.5



RIV 1 expansion from 6.5 to 7.5 mm
RIV2 from 4.5 to 5.5 mm

DUCT ACCESSORIES (Continued)

PRRIV

Part Number	Ø in.	Ø mm.	PCS Package
PRRIV1	0.25	6.5	1000 (5x200)
PRRIV2	0.18	4.5	1000 (5x200)



PLEASE CALL FOR PRODUCT AVAILABILITY

Riveting tool.

For the fast installation of the RIV1 and RIV2 rivets.

PRRIV1 = Riveting tool RIV1

PRRIV2 = RIV2 adapter

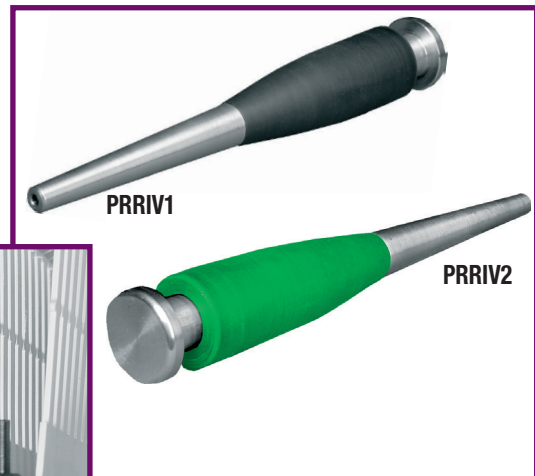



S()C

Part Number	Height		PCS Package
	inch	mm.	
S1C (2 separators)	1.57	40	30
S2C	2.36	60	50
S3C	1.57	40	60
S4C	3.15	80	32
S5C	3.94	100	32

PLEASE CALL FOR PRODUCT AVAILABILITY

Cable separator.

For separating the cables housed inside the ducting. Snap on the built-in rail of the duct. Several separation schemes can be obtained using different separators.

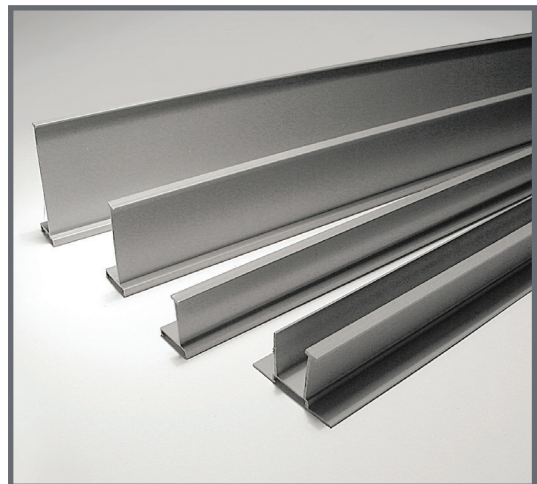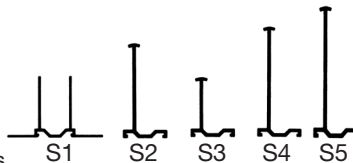



DMF

Part Number	CP Type	PCS Package
DMF	DMF	100 (2x50)

PLEASE CALL FOR PRODUCT AVAILABILITY

Cable tie holder which can be attached to all ducts fitted with a base rail.

Material: Nylon

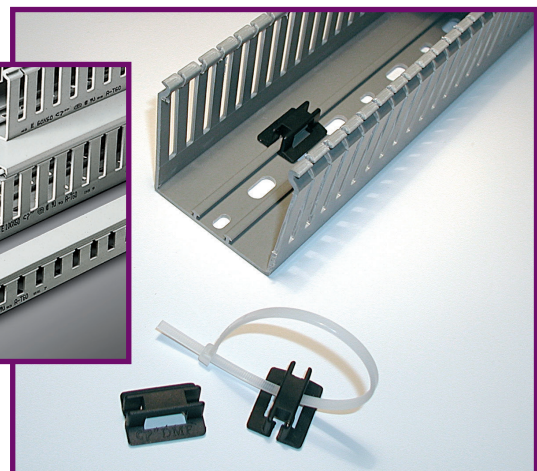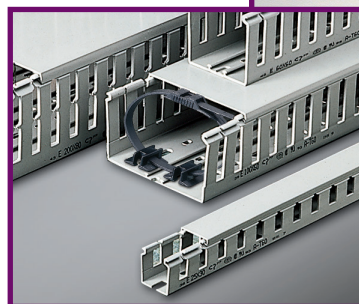

'SNAP-DUCT' RACEWAY


- Easy to install
- Low profile
- Durable
- Category 5
- Colours
- 48 Volts (max.)



All raceways, fittings and accessories are manufactured from high impact PVC and ABS, which complies with both UL 94V-0 and CSA 0.6V-0 flame ratings.

TYPICAL APPLICATION:


To secure, protect, and conceal all types of wire and cable in any residential, commercial or industrial application.

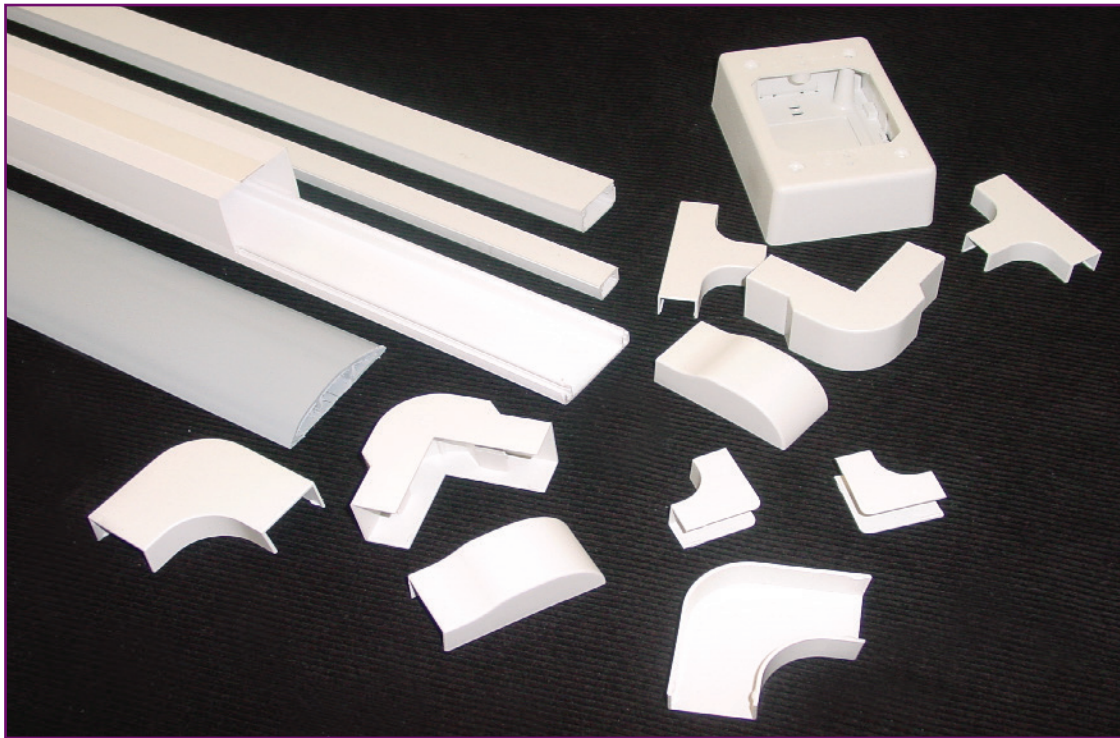

Reducer

REDUCER


Part #	Description	Colour	Standard Package
SD1250/500 RWH	02 to 01 Reducer	Off White	1 Pk



COMBO PACK *

Part #	Description	Colour	Standard Package
SD500CBPKWH	01 Combo-Pack	Off White	1 Pk

*Each bag contains, 4 Couplings, 2 End Caps, 4 Inside Corners, 4 Outside Corners, 4 Right Angles and 2 Tee Connectors.

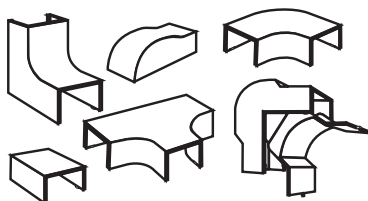

COMBO PACK *


Part #	Description	Colour	Standard Package
SD1250CBPKWH	01 Combo-Pack	Off White	1 Pk

*Each bag contains, 2 Couplings, 1 End Cap, 2 Inside Corners, 2 Outside Corners, 4 Right Angles and 1 Tee Connectors.




'SNAP-DUCT' RACEWAY

SINGLE



DOUBLE



SINGLE GANG BOX

Part #	Description	Colour	Size W" x H"	Standard Package
SD-BOX-WH	Single Gang Box	Off White	3-3/8" x 5-1/8" x 1-11/16"	1

DOUBLE GANG BOX

Part #	Description	Colour	Size W" x H"	Standard Package
SD-2G-BOX-WH	Double Gang Box	Off White	5-1/4" x 5-1/8" x 2"	1

RACEWAY WITH TAPE

Part #	Description	Colour	Size W" x H"	Length	Standard Package
SDPV 500 WH6	Raceway W/Tape	Off White	5/8" X 1/2"	6' 0"	300 ft



Coupling



Inside Corner



End Cap



Tee Connector




Right Angle



Outside Corner





Category 5 Outside Corner



RACEWAY - 01 FITTINGS

Part #	Description	Colour	Standard Package
SD 500 CPWH	Coupling	Off White	1
SD 500 ICWH	Inside Corner	Off White	1
SD 500 ECWH	End Cap	Off White	1
SD 500 TWH	Tee	Off White	1
SD 500 RAWH	Right Angle	Off White	1
SD 500 OCWH	Outside Corner	Off White	1
SD 5005 OCWH	Cat.5 Outside Cnr.	Off White	1




RACEWAY WITH TAPE

Part #	Description	Colour	Size W" x H"	Length	Standard Package
SDPV 1250 WH6	Raceway W/Tape	Off White	1-1/4" X 5/8"	6' 0"	120 ft

Coupling




Inside Corner




End Cap




Tee Connector




Right Angle



Drop Ceiling Entrance End



Category 5 Outside Corner



RACEWAY FITTINGS

Part #	Description	Colour	Standard Package
SD 1250 CPWH	Coupling	Off White	1
SD 1250 ICWH	Inside Corner	Off White	1
SD 1250 ECWH	End Cap	Off White	1
SD 1250 TWH	Tee	Off White	1
SD 1250 RAWH	Right Angle	Off White	1
SD 1250 OCWH	Cat.5 Outside Cnr.	Off White	1
SD 1250 DCEWH	Drop Ceiling End	Off White	1

Carpet / Floor Ramp



CARPET / FLOOR RAMP

Part #	Description	Colour	Size W" x H"	Length	Standard Package
RAMP3000GR6	Carpet/Floor Ramp	Gray	3" x 5/8"	6' 0"	60 ft.


RACEWAY 1 X 2

Part #	Description	Colour	Size W" x H"	Length	Standard Package
SDPV1000WH6	Raceway w/tape	Off White	1" x 2"	6' 0"	60 ft.

RACEWAY 2 X 2

Part #	Description	Colour	Size W" x H"	Length	Standard Package
SDPV2000WH6	Raceway w/tape	Off White	2" x 2"	6' 0"	36 ft.

Raceway 2 x 2



WIRE FILL CAPACITY CHART

Duct Size WxH				ELECTRICAL												COMMUNICATION		
				8 AWG	10 AWG	12 AWG		14 AWG			16 AWG		18 AWG		22 AWG	24 AWG		
				0.216	0.153	0.122	0.158	0.105	0.139	0.165	0.096	0.125	0.084	0.113	0.065	0.217	0.25	0.422
inches	mm	G.S. in ²	G.S. mm ²	THHN	THHN	THHN	MTW	THHN	MTW	MTW	TFFN	MTW	TFFN	MTW	MTW	UTP/CM Cat5e	STP/CM Cat6e	UPT/CM
0.59x0.67	15 x 17	0.263	170	3	5	10	6	14	8	6	16	10	21	12	36	3	2	1
0.59x1.57	15 x 30	0.496	320	6	10	19	11	52	15	10	31	18	40	22	67	6	5	1
0.59x1.57	15 x 40	0.697	450	9	13	27	16	72	21	15	43	26	57	30	95	8	6	2
0.98x1.18	25 x 30	0.852	550	10	16	33	20	89	25	18	53	31	69	37	116	10	8	2
0.98x1.57	25 x 40	1.178	760	14	23	45	27	122	35	25	73	43	96	51	160	14	11	3
0.98x2.36	25 x 60	1.86	1200	23	36	72	43	193	55	39	116	68	151	81	252	23	17	5
0.98x3.15	25 x 80	2.387	1540	29	46	92	55	248	71	50	148	88	194	104	324	29	22	6
0.98x3.94	25 x 100	3.565	2310	44	69	137	82	371	106	75	222	131	289	155	483	43	33	9
1.57x1.18	40 x 30	1.426	920	18	27	55	33	148	42	30	89	52	116	62	193	17	13	4
1.57x1.57	40 x 40	2.03	1310	25	39	78	47	211	60	43	126	74	165	88	275	25	19	5
1.57x2.36	40 x 60	3.038	1960	37	58	117	70	316	90	64	189	111	247	132	412	37	28	8
1.57x3.15	40 x 80	4.154	2680	51	80	160	95	432	123	87	258	152	337	181	563	51	38	10
1.57x3.94	40 x 100	5.192	3350	64	100	200	119	540	154	109	323	190	422	226	704	63	48	13
2.36x1.18	60 x 30	2.17	1400	27	42	84	50	226	64	46	135	80	176	94	294	26	20	5
2.36x1.57	60 x 40	3.038	1960	37	58	117	70	316	90	64	189	111	247	132	412	37	28	8
2.36x2.36	60 x 60	4.774	3080	59	92	184	110	496	142	100	297	175	388	208	647	58	44	12
2.36x3.15	60 x 80	6.509	4200	80	125	251	149	677	193	137	405	239	529	283	883	79	60	16
2.36x3.94	60 x 100	8.245	5320	101	159	317	189	857	245	174	513	302	670	359	1118	100	76	21
3.15x1.57	80 x 40	4.115	2655	51	79	158	94	428	122	87	256	151	334	179	558	50	38	10
3.15x2.36	80 x 60	6.471	4175	79	124	249	149	673	192	136	402	237	525	281	878	79	59	16
3.15x3.15	80 x 80	8.827	5695	108	170	340	203	917	262	186	549	324	717	384	1197	107	81	22
3.15x3.94	80 x 100	11.043	7125	136	212	425	253	1148	327	232	687	405	897	480	1498	134	101	28
3.94x1.57	100 x 40	5.231	3375	64	101	201	120	544	155	110	325	192	425	227	709	64	48	13
3.94x2.36	100 x 60	8.207	5295	101	158	316	188	853	243	173	510	301	666	357	1113	100	75	21
3.94x3.15	100 x 80	11.182	7215	137	215	431	257	1162	332	235	695	410	908	486	1517	136	103	28
3.94x3.94	100 x 100	14.158	9135	174	272	545	325	1472	420	298	880	519	1150	616	1920	172	130	36
3.94x5.91	100 x 150	21.226	3695	261	408	817	487	2206	629	447	1320	778	1724	923	2879	258	195	54
4.72x3.15	120 x 80	13.499	8710	166	260	520	310	1403	400	284	839	495	1096	587	1831	164	124	34
5.91x3.94	150 x 100	21.187	3670	260	407	816	486	2202	628	446	1317	777	1721	921	2873	258	194	54

TECHNICAL INFO

Materials characteristics

	PVC Self-extinguishing	ABS Self-extinguishing
Specific gravity	1.48 g/cm ³	1.05 g/cm ³
Shore hardness	79 D	110 R
Vicat degree (5kg)	76°C	95°C
Izod resistance at 23° C (C. Int.)	7.4 Kj/m	70 J/m
Izod resistance at 0° C (C. Int.)	4.1 Kj/m	40 J/m
Izod resistance at -10° C (C. Int.)	4 Kj/m	5 J/m
Ultimate tensile stress	37.3 N/mm ²	40 MPa
Yield point	46.2 N/mm ²	25%
Modulus of elasticity	2736 N/mm ²	2400 MPa
Flame resistance (According to UL94)	V0	V2
Linear thermal expansion coefficient	0.1 mm/m/°C	0.19

Classification grading according to the standard EN 50085-2/3

Reference to the specifications for slotted and solid wiring ducts

Classification min temperature of transport and storage		
1ª Code	Temp. °C	°F
2XX	-25	-13

Classification min temperature of installation and use		
1ª Code	Temp. °C	°F
X3X	-5	23

Classification max temp. of use		
1ª Code	Temp. °C	°F
XX1	+60	140

Derivating classification of our wire ducts

Type A	231
Type S	231
Type EDGE	231

RESISTANCE OF PVC TO CHEMICAL AGENTS

Resistance of PVC to chemical agents

Chemical Compound	Concentration	Temp. °C	Resistance of PVC
LEAD ACETATE, solution	hot saturated	50	+
VINEGAR (wine)	commercially available	40	+
ACETONE	trace	20	-
ACETONE	100%	20	-
FATTY ACIDS	100%	60	+
ARSENIC ACID, solution	dilute	40	+
BENZOLIC ACID, solution	any concentration	20	+
BORIC ACID, solution	dilute	40	+
BUTYRIC ACID, solution	20%	20	+
CITRIC ACID, solution	up to 10%	40	+
HYDROCHLORIC ACID, solution	up to 30%	40	+
CHROMIC ACID, solution	up to 50%	40	+
FORMIC ACID	100%	20	+
FORMIC ACID, solution	up to 50%	40	+
NITRIC ACID, solution	up to 30%	50	+
BATTERY ACID	-	60	+
PRUSSIC ACID	-	60	+
SILICIC ACID, solution	all concentrations and types	60	+
SULPHURIC ACID, solution	up to 40%	40	+
SUCCINIC ACID, solution	-	60	+
TANNIC ACID	10%	60	•
TARTARIC ACID, solution	up to 10%	40	+
WATER	100%	40	+
AMMONIA WATER	hot saturated	40	+
BROMINE WATER	cold saturated	20	+
CHLORINE WATER	saturated	20	•
SEA WATER	-	60	•
WHITE SPIRIT	-	20	•
SALT WATER	-	40	+
CARBONATED WATER	normal	40	•
AQUA VITAE, all types	commercially available	20	+
DENATURED ETHYL ALCOHOL (sol. 2%)	96%	20	+
METHYL ALCOHOL	100%	40	+
AMMONIA GAS	100%	60	+
LIQUID AMMONIA	100%	20	•
CARBON DIOXIDE dry	100%	60	+
PURE ANILINE	100%	20	-
PHOTOGRAPHIC DEVELOPMENT BATHS	commercially available	40	+
PETROL	100%	60	+
PETROL for tests	-	20	+
BENZOL	100%	20	-
ALCOHOLIC DRINKS	commercially available	20	+
BEER	commercially available	20	+
BORAX, solution	dilute	40	+
BROMINE, liquid	100%	20	-
BUTADIENE	50%	60	+
BUTANE, gas	-	20	+
BUTANOL	up to 10%	20	+
BEESWAX	commercially available	20	+
CHLORINE active	usual concentration	40	+
CHLORINE GAS, dry	100%	20	+
CHLORINE GAS, wet	0.5%	20	+
LIQUID CHLORINE	-	20	-
ALUMINIUM CHLORIDE, solution	dilute	40	+
CALCIUM CHLORIDE, aqueous (sedim.)	-	60	•

Chemical Compound	Concentration	Temp. °C	Resistance of PVC
CALCIUM CHLORIDE, solution	dilute	40	+
IRON CHLORIDE, solution	up to 10%	40	+
HEXANE	-	20	+
ETHYL BENZOL	-	20	-
FORMALDEHYDE	dilute	40	+
FREON 12	100%	20	+
OIL, heating	-	20	•
GELATINE, solution	all concentrations and types	40	+
GLYCERINE, solution	all concentrations and types	60	+
HYDROGEN	100%	60	+
BARIUM HYDROXIDE, solution	all concentrations and types	60	+
POTASSIUM HYDROXIDE, solution	up to 40%	40	+
SODIUM HYDROXIDE, solution	up to 40%	40	+
MILK	commercially available	20	+
LIQUID ANTIFREEZE, for motor vehicles	commercially available	20	+
LYE	-	-	-
MOLASSES	industrial concentrate	20	+
PETROL/BENZOL MIXTURE	80/20%	20	-
NAPHTHALENE	-	20	-
NEKTAL BX, solution	dilute	40	+
OILS AND GREASES	commercially available	60	+
LUBRICATING OILS	100%	20	+
CAMPHOR OIL	100%	20	+
DIESEL OIL	100%	20	+
CORNFLOWER OIL	-	20	+
LINSEED OIL	100%	60	•
MANDARIN OIL	-	20	+
MINERAL OIL	100%	20	+
SILICONE OIL	100%	20	+
TURPENTINE OIL	100%	60	•
TRANSFORMER OIL	100%	20	+
LIQUID PARAFFIN	100%	20	-
OZONE	100%	20	+
PARAFFIN	-	60	+
POTASSIUM PERMANGANATE	up to 6%	20	+
LIQUID PROPANE	100%	20	+
COOKING SALT, solution	dilute	40	+
BARIUM SALTS, solution	all concentrations	60	+
FERTILIZER SALTS, solution	up to 10%	60	+
ZINC SALTS, solution	cold diluted	60	+
SODIUM CARBONATE, solution	dilute	40	+
ALUMINIUM SULPHATE, solution	dilute	40	+
COPPER SULPHATE, solution	dilute	40	+
ZINC SULPHATE, solution	dilute	40	+
SOLUTION for photographic laboratories	commercially available	40	+
FRUIT JUICES	usual concentration	60	+
CARBON TETRACHLORIDE technical	100%	20	•
TETRAETHYL LEAD	100%	20	+
TETRAHYDROFURAN	100%	20	-
TINCTURE OF IODINE	commercially available	20	-
TOLUENE	100%	20	-
UREA, solution	up to 10%	40	-
URINE	normal	40	+
WINES, red and white	commercially available	20	+
SULPHUR	-	60	•

Key: + Resistant - Not resistant • Limited resistance

Flame resistance

Homologation
Cod. MI422C30CD100001
File 4190, sub. 326 - Material prototype: G30

PVC: Class M1 (NFP 92-501)
Self-extinguishing (UL94 V0) for trunking
GWT 850° for accessories