

NOTES:


- ① MAT'L: COPPER (STOCK TKN. $\frac{.031}{.79}$ ^{$\pm .001$})
PLATING: ELECTRO-TIN (.0003 MIN.)
- ② INSULATION: MOLDED PVC (BLUE)

STUD SIZES: ($\pm .005$)

02 = .094
04 = .119
06 = .146
08 = .173
10 = .198
14 = .265
56 = .328
38 = .390

"UL" LISTING *E32244
"CSA" LISTING *18689

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$

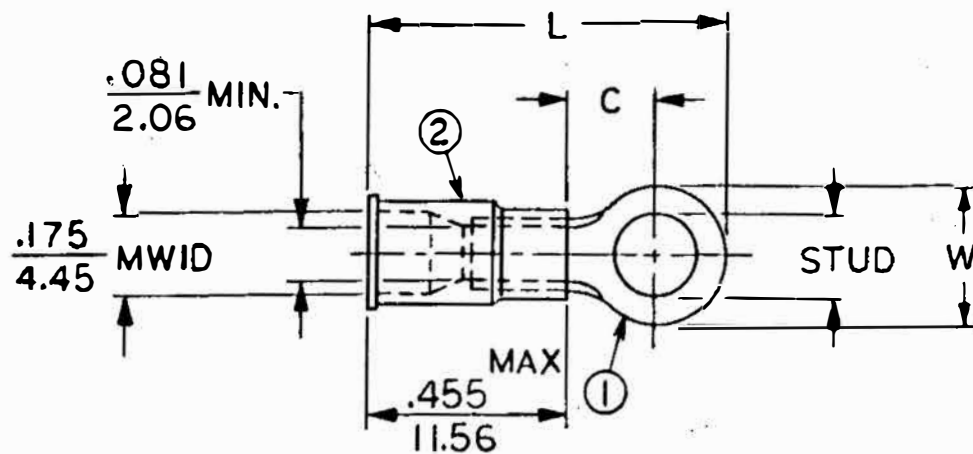

MWID = MAXIMUM WIRE
INSULATION DIAMETER

WIRE SIZE: 16-14 AWG
1.0-2.5 MM²

PART NUMBER	"W" $\pm .010$	"C" MIN.	"L" MAX.				AVAILABLE STUD SIZES	
	$\frac{.534}{13.56}$	$\frac{.554}{14.07}$	$\frac{1.311}{33.30}$				10X, 14X, 56X, 38X	
	$\frac{.250}{6.35}$	$\frac{.209}{5.31}$	$\frac{.835}{21.21}$				02X, 04X, 06X, 08X	
	$\frac{.467}{11.86}$	$\frac{.388}{9.86}$	$\frac{1.112}{28.24}$				10X, 14X, 56X	
R4B6(M)	$\frac{.312}{7.92}$	$\frac{.285}{7.24}$	$\frac{.926}{23.52}$				04X, 06X, 08X, 10X	
	$\frac{.342}{8.69}$	$\frac{.310}{7.87}$	$\frac{.971}{24.66}$				04X, 06X, 08X, 10X	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED			REFERENCE	SCALE: NTS	DATE	TITLE:		
FRAC.	DEC.	ANG.		DRWN. BY: <i>Y6</i>	10-25-84	RING TONGUE TERMINAL INSULKRIMP 200 SERIES		
				CHKD. BY: <i>GZ</i>	11-3-84			
				APPRD. BY:				
						DWG. NO.	A	CUSTOMER DWG.

FILE NO.

B-CD-201-01