


Dual Wall (Adhesive-Lined) Heat Shrink Tubing in Spools

3:1 SHRINK RATIO

Now Available in Small (2 to 10m) & Large (25 to 200m) Spools

- 3:1 shrink ratio
- Made of adhesive-lined, cross-linked polyolefin that is flexible and easy to work with
- Adhesive inner wall provides superior sealing against water, moisture and other contaminants
- Excellent for coverage of irregularly shaped connectors and components

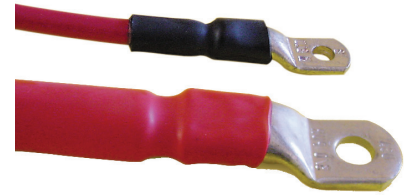

Heat Shrink Applied to Battery Cable Assemblies




Why Use Spools?

Cutting off as much as you need from a continuous spool reduces wasted tubing.

Spoiled Dispenser Box – 2 Metre to 10 Metre Lengths

Expanded ID (Trade Size)	Recovered/ Shrink ID (Approx)	Use with Wire Size (Approx)	Length	Part#	Colour
1/8"	3/64"	22-18GA	10 metres	769974RL	Black
1/8"	3/64"	22-18GA	10 metres	769971RL	Red
3/16"	1/16"	20-12GA	8 metres	769976RL	Black
3/16"	1/16"	20-12GA	8 metres	769982RL	Red
1/4"	3/32"	16-10GA	3 metres	769977RL	Black
1/4"	3/32"	16-10GA	3 metres	769983RL	Red
3/8"	1/8"	12-6GA	5 metres	769978RL	Black
3/8"	1/8"	12-6GA	5 metres	769988RL	Red
1/2"	3/16"	8-2GA	4 metres	769979RL	Black
1/2"	3/16"	8-2GA	4 metres	769985RL	Red
3/4"	1/4"	4-2/0GA	2.5 metres	769980RL	Black
3/4"	1/4"	4-2/0GA	2.5 metres	769986RL	Red
1"	11/32"	2-4/0GA	2 metres	769981RL	Black
1"	11/32"	2-4/0GA	2 metres	769987RL	Red

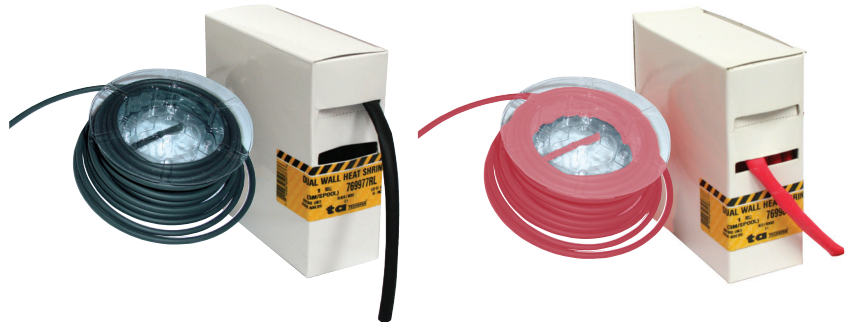

Spoiled Dispenser Box (2 Metre to 10 Metre Lengths)

Master Spool – 25 Metre to 200 Metre Lengths

Expanded ID (Trade Size)	Recovered/ Shrink ID (Approx)	Use with Wire Size (Approx)	Length	Part#	Colour
1/8"	3/64"	22-18GA	200 metres	*769974MR	Black
3/16"	1/16"	20-12GA	100 metres	*769976MR	Black
1/4"	3/32"	16-10GA	100 metres	*769977MR	Black
3/8"	1/8"	12-6GA	50 metres	*769978MR	Black
1/2"	3/16"	8-2GA	25 metres	*769979MR	Black
3/4"	1/4"	4-2/0GA	25 metres	*769980MR	Black



Master Spool (25 Metre to 200 Metre Lengths)