




Tel: (450) 449-0412 ; 1-866-540-0412 Fax: (450)449-9115 ; 1-866-499-9115




DX SERIES

3000 VA, PART # : DX 3000QHU

ELECTRICAL SPECIFICATIONS

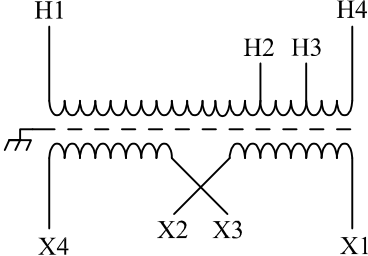PHASE:	1	PRIMARY VOLTAGE		SECONDARY VOLTAGE							
FREQ.:	60 Hz.	600	2, 2 ½ % ANFC, 2, 2 ½ % BNFC	120/240							
INSUL. CLASS	H(180°C)										
TEMP. RISE	< 115°C										
								PRIMARY VOLTS	CONNECT PRIMARY LINES TO	INTER-CONNECT	CONNECT SECONDARY LINES TO
								600	H1 - H4		
								SECONDARY VOLT			
		120		X1 to X3 X2 to X4	X1 - X4						
		240		X2 to X3	X1 - X4						

MECHANICAL SPECIFICATIONS: (Dimensions = inches).

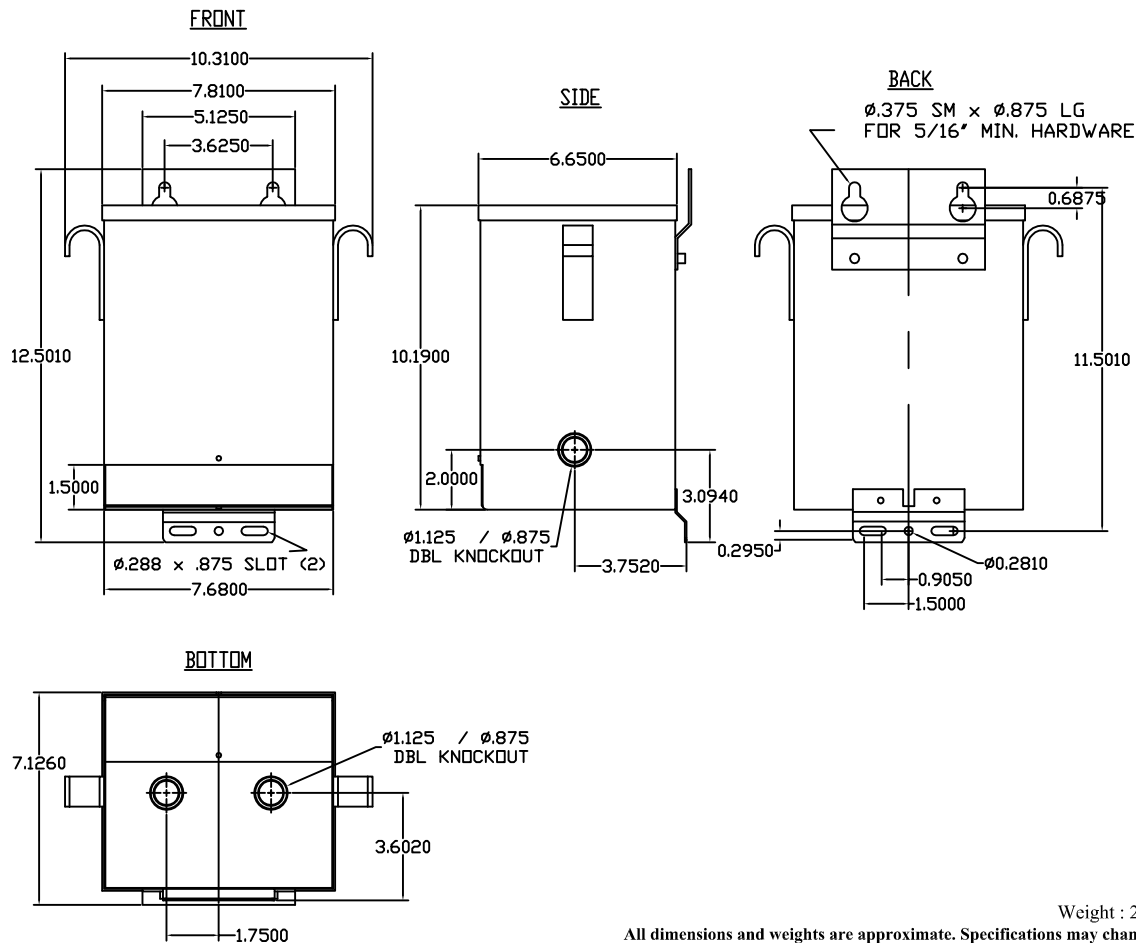

Weight : 24.9 Kg (55 lbs)

All dimensions and weights are approximate. Specifications may change without notice.

								MODEL NUMBER: DX 3000QHU	
ZONE	REV	REVISION	DESCRIPTION	DATE	APPROVAL			DWG NO.	REV
						Drawn by:	SS	71CUDX3000QHU-ENG	00
DATE: JANUARY/24/2013						PAGE: 1 of 1			