



Saves Your Energy

PRODUCT CARD

19.6.2013

SPCP131808G.U

Name: **Cubo S enclosure**
Size 125 x 175 x 75 mm, 50 mm base, plain sides, grey cover, PC
Type: SPCP131808G.U
EAN: 6438100116026
Description: Ensto Cubo S is a series of small to medium size enclosures available with knockouts or plain sides. The base of the enclosures is equipped with unique slots for printed circuit boards.
Package: 25
Unit: PCS



Technical specification

Operating temperature (°C):	- 40 °C... +80 °C
Short term temperature range:	- 40 °C... +120 °C
Colour:	RAL 7035
Content:	Enclosure base, cover, cover screws, mounting screws
Material, base:	Fiberglass reinforced polycarbonate
Material, cover:	Polycarbonate
Material, cover screws:	Polyamide
Material, gasket:	Polyurethane
Weight (kg):	0,381
Inner depth (mm):	60,5
Outer base depth (mm):	50
Outer cover height (mm):	25
Size (mm):	125 x 175 x 75
Degree of protection:	IP 66, IP 67
Environmental type UL:	4, 4X, 6, 12, 13
Flammability rating:	UL 746C 5V
Impact strenght:	IK 08
Standard:	EN 62208, UL 508A, GOST
UL File no.:	E189312
UL category:	NITW





Ensto Finland Oy

Ensio Miettisen katu 2
P.O.Box 77
06101 Porvoo, Finland


Tel. +358 204 76 21
Fax +358 204 76 2516

www.ensto.com

ID	Description	Date	By	Appr.
A				

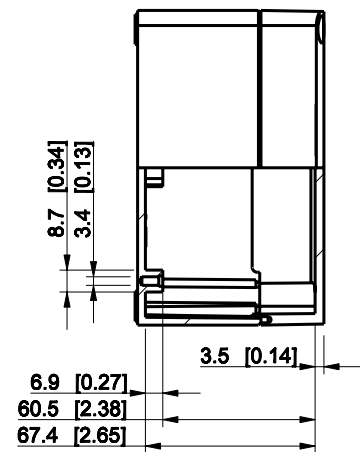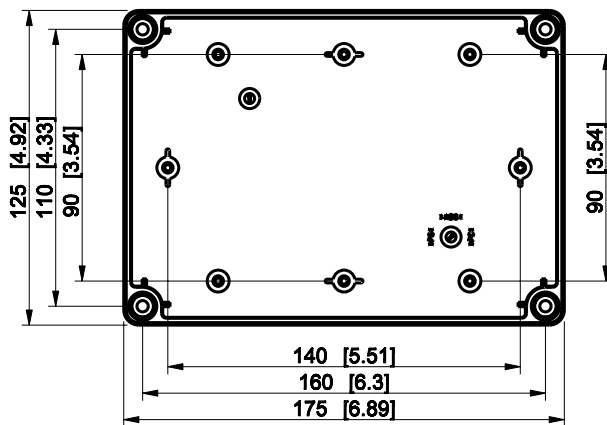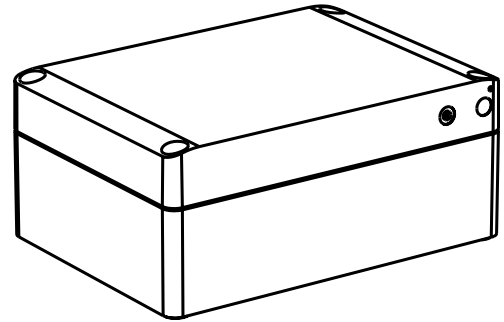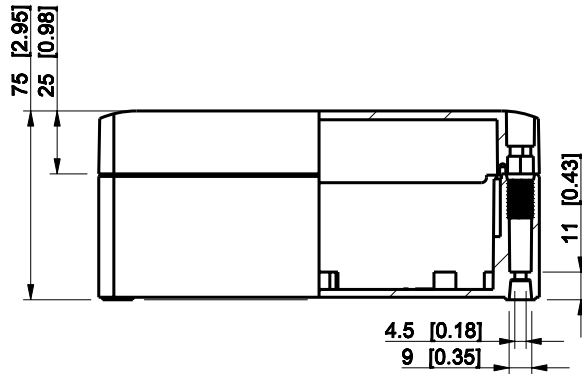

Dimensions in mm [inches]

model drawing	SPCP131808G PART CUBOS DRAWING	Material: Polycarbonate, fiberglass-reinforced			Color: RAL 7035			
		Supplier:		Tool No:		Weight [kg]: 0.34	Volume:	
		ENSTO ENSTO CONTROL OY			SPCP131808G			
		Scale	Date	08.12.08				
		1:3	By	PKos				
		-	Checked					
		-	Ctrl					
		Replaces:						
		Replaced:						
		Drw No: - A						
Ref: Cubo S								
Code: SPCP131808G								
Sheet No:								